

ROSWELL SOLAR PATH LIGHT

DESCRIPTION

The Roswell Solar Path Light is a solar energy- powered path light. The fixture is equipped with motion sensor settings. Automatic operation and wireless design make for easy installation and use.

To turn on or off, press and hold the power button for three seconds. To change modes between three available settings, press the button for one second.

FEATURES


- Stainless steel construction with opaque diffuser
- Two-way mounting with stake or flush mount
- Motion sensor is active at 6 to 8 meter distance at 90-degree angle
- Mono-crystalline solar panel
- Includes Battery – 18650, 2600mAh, 3.7V

ROSWELL SOLAR PATH LIGHT

| | |
|---------------------|-----------------------------|
| Solar Panel | 1.5W, 5V |
| Kelvin Temperature | 3000 |
| Lumens | |
| Constant Dim Light | 30 |
| Standby | 200 for 25 sec |
| Motion | 300 for 25 sec |
| CRI | 83 |
| IP | 65 |
| Replaceable Battery | 18650 |
| Warranty (years) | 2 (excludes battery) |
| Full Charge Time | 8 hours |



Part Number: **ROSWELL-SOLAR-PL**

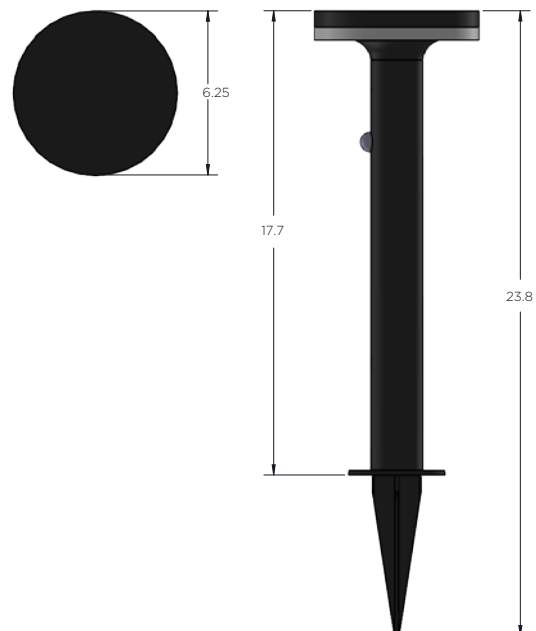



ROSWELL-SOLAR-PL

INSTALLING THE GROUND STAKE

1. Dig a hole in the ground approximately 4" wide by 7" deep. When working with soft soil, use a rubber mallet to drive the stake into the ground.
2. Place the fixture in the center of the hole.
3. Use a level to ensure the top of the stake is 2" above the ground and that it is level vertically.

INSTALLING ON DECK APPLICATIONS

1. Use three #10 x 2" round head stainless steel deck screws to mount the fixture base to wood or composite deck material.
2. Position the motion sensor in the direction which traffic regularly approaches.

• IMPORTANT: FOLLOW THESE RECOMMENDATIONS FOR OPTIMAL RESULTS

1. Choose areas with full sun.
2. When possible, direct the solar panel to face the south.
3. Do not install this product in a heavily-shaded area.
4. Be sure there is no ambient light from any other light source directed at the solar panel during the evening hours.