


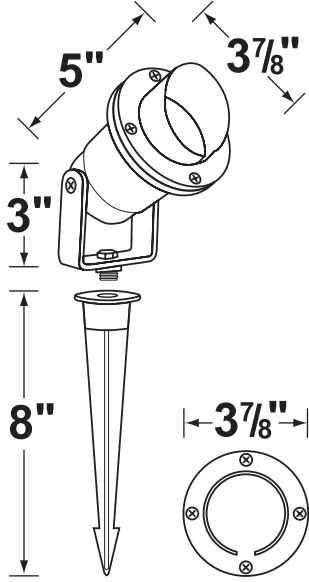



<b>CL-512</b>			
<b>Product Specification Sheet</b>			
<b>HOUSING:</b>	Die-cast aluminum.		
<b>FINISH:</b>	Polyester UV powder coated, available in <b>BK-Black</b> .		
<b>LENS:</b>	Clear, tempered, and heat resistant glass with silicone gasket.  See accessories & parts for special effect lenses, honeycomb louver and frosted lens CX-380-FR.		<b>CX-854</b> DIRECT BURIAL WIRENUT AVAILABLE
<b>LAMP TYPE:</b>	12V, MR-16 halogen, 50W max.  See lamp guide for LED and color MR-16 lamps.		
<b>MOUNTING:</b>	Yoke mounted on ground spike. Wire connector excluded.		
<b>WIRING:</b>	Fixture is prewired with a 3-foot pigtail of direct burial cable.		
			

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.