

# SPECIFICATION SHEET

## PRODUCT # : CL-532B-AB

•Directional Lights

•Cast Brass

### Fixture Specifications:

**Housing & Shroud:** Corrosion Resistant Cast Brass.  
Shroud is adjustable and extendable.

**Finish:** **AB- Antique Bronze.** Natural toning process.  
AB finish will vary due to artistic process.

**Lens:** Clear and heat resistant convex glass.

**Socket:** Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place.

**Lamp:** 12V, MR-16 halogen, 50W max. L-BAB-C20 (20w) standard. LED lamps available in 3.5W, 5W and 7W-2700K color temperature. Available in 15°, 45°, 60° beam spreads for Cree and 45° for Epistar brands.

**Wiring:** Fixture is prewired with a 5-ft 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.



**Gasket:** Silicone gasket for water tight sealing.

**Knuckle:** Adjustable cast brass knuckle with thumb screw and ½" NPT threaded male hub on bottom.

**Mounting Spike:** Standard injection molded spike with ½" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V  
Voltage range for LED Lamps are 9V-17V  
Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited lifetime warranty on fixture housing against manufacturer's defects.

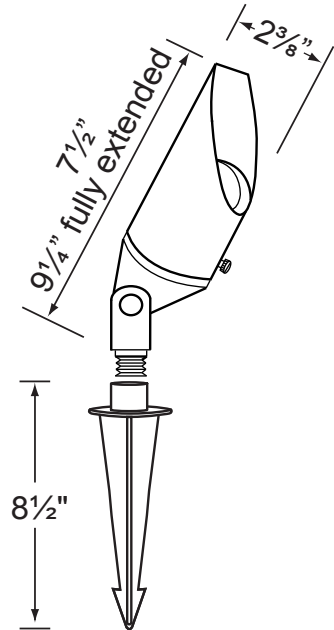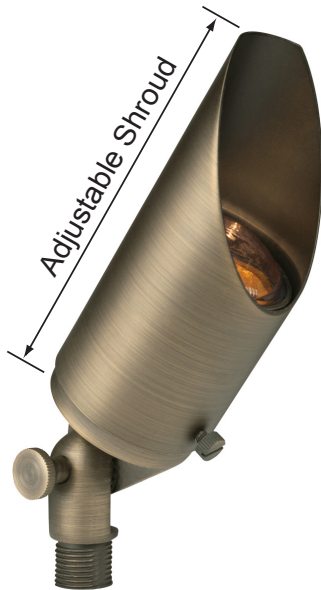

### MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



#### Mounting Stems

CX-682B-AB 6"  
CX-683B-AB 12"  
CX-684B-AB 18"  
CX-685B-AB 24"  
**AB - Antique Bronze**



#### Mounting Canopy

CX-709B-AB  
**AB- Antique Bronze**



#### Mounting Pedestal

CX-603-BK  
**BK - Black**

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: