

WWW.CORONALIGHTING.COM S

# **SPECIFICATION SHEET**

1633 Staunton Ave Los Angeles, CA 90021

FAX.

(800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT #: CL-648C-RC

**Fixture Specifications:** 

**Housing:** Corrosion resistant solid copper.

Stem: Solid copper pipe with ½" NPT on bottom.Finish: RC- Raw Copper. Will age gradually over time.

Lens: Frosted polycarbonate, cover over lamp providing

sprinkler water protection.

**Socket:** Top grade fixed ceramic bi-pin socket. Easy tool

free lamp access.

**Lamp:** 12V, T3 halogen, 20W max. L-10T3 (10w) standard.

LED lamps available in 1W and 4W- 3000k color temperature. Xenon lamps available in 10W and 20W

• Area Lights • Solid Copper

Wiring: Fixture is prewired with a 18-2 SPT2-W direct

burial cord. Wire connector available seperately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.

Mounting Spike: Standard injection molded spike with ½" NPT

threaded female hub.

Electrical Notes: A remote 12V transformer required, may be


ordered to Corona Lighting seperately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 10V-14V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and


stem against manufacturer's defects.





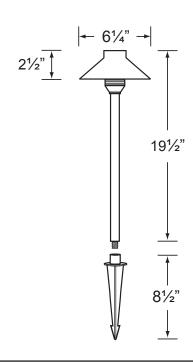

#### MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



### Mounting Stems

CX-682C-RC 6"
CX-683C-RC 12"
CX-684C-RC 18"
CX-685C-RC 24"
RC - Raw Copper



### Mounting Canopy CX-709B-BR

BR- Natural Brass



## Mounting Pedestal

CX-603-BK BK - Black

#### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: