
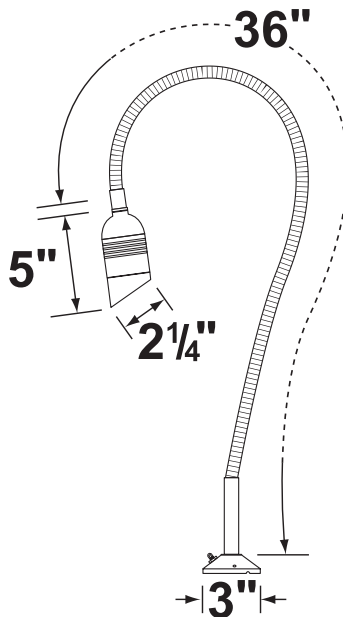



|                                    |                                                                                                                    |                                                                                       |                 |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------|
| <b>CL-802-D</b>                    |                                                                                                                    |     | <b>CL-802-D</b> |
| <b>Product Specification Sheet</b> |                                                                                                                    |                                                                                       |                 |
|                                    |                                                                                                                    |                                                                                       |                 |
| <b>HOUSING:</b>                    | Die-cast aluminum fixture with flexible steel black polyolefin shrink wrap arm, available in 12", 24", 36" length. |                                                                                       |                 |
|                                    |                                                                                                                    |    |                 |
| <b>FINISH:</b>                     | Polyester UV powder coated, available in <b>BK</b> -Black.                                                         |                                                                                       |                 |
| <b>LENS:</b>                       | Clear, tempered and heat resistant glass.                                                                          |                                                                                       |                 |
|                                    |                                                                                                                    |                                                                                       |                 |
| <b>LAMP TYPE:</b>                  | 12V, MR-11 halogen, 35W max.                                                                                       |                                                                                       |                 |
|                                    |                                                                                                                    |  |                 |
| <b>MOUNTING:</b>                   | 3" round aluminum base canopy with on/off push button covered by rubber boot.                                      |                                                                                       |                 |
| <b>WIRING:</b>                     | Fixture is prewired with a 3-foot pigtail of cable.                                                                |                                                                                       |                 |

- Fixture is supplied with 20W MR-11 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- To indicate an arm length, add "**BK-12**", "**BK-24**", "**BK-36**" to the end of the product number.