

specifications IL600.xxx.550



IL600.710.550 Textured Bronze Finish Shown

construction

Model IL600.xxx.550 6" width x 1/2" height x 7/8" depth

- Available in 8 polyester powder coated finishes
- 304 Stainless Steel Unibody construction
- Heavy 18 gauge 304 Stainless Steel
- Mechanically fastened LED package
- Integrated cleats for easy retrofits



4000726
tested and complies with UL standard 1838

patents pending

electrical

Model IL600.xxx.550


Dual 1/2 watt LEDs

10 watt output approx / ultrawarm white

1.2 watt energy consumption


- 2400K ultrawarm white LED
true incandescent look and feel
- DirectDrive LED technology
- Multi Circuit Parallel LED structure
- Field replaceable LED module
- Nylon Lens with integrated heat sink
- 72" long 18/2 leads attached
- Voltage requirement min 8.0v AC / max 12.5v AC
- Estimated life of 40,000 hours at 11.5v AC input
- Fully dimmable
- Engineered for magnetic and electronic transformers

dimensions

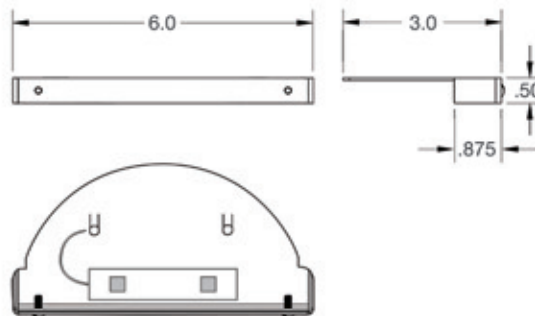

MANUFACTURED IN U.S.A.

16 finishes

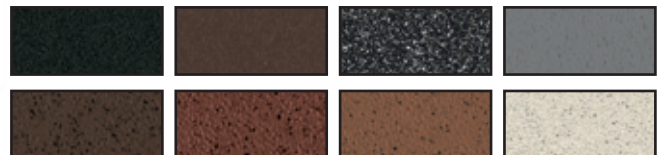

51 North Elm Street, Wernersville, PA 19565 Phone: 800.861.1364 Fax: 800.398.7661 www.integral-lighting.com