UNIQUE LIGHTING SYSTEMS®

MULTI-MATIC: 12V Multi-Matic 150W LED Transformer

LED Transformer

Stainless Steel Transformer Multi-Matic Series



TRANSFORMER ORDERING INFORMATION


Example: 150SSSL-LED

Tinned 6061-T6 aluminum

≧ © ≩ © 2 ©

0

lug with 3mm set screws

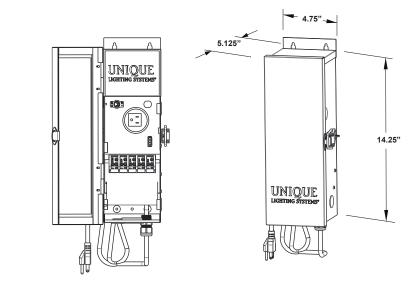

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.

SPECIFICATIONS

Core

Engineered single core design with precision grain-oriented steel laminations. High temperature glass impregnated nylon bobbin and solid copper mag wire. To ensure robust construction each output tap is welded to the mag wire for optimum connectivity.

3.0

Δ MOUNTING DETAIL

lΛ

Construction

304 stainless steel (complies with NEMA 3R).

Primary Protection

LED safe 15 AMP breaker.

Power Cord

16/3 SJTW power cord. Six feet in length.

Electrical Requirements

Available power ratings 150 Watts. Primary voltage is 120 volts, secondary voltage is 12V - 15V output.

Output Terminal

Tinned 6061-T6 aluminum lug strip with 3mm hex set screw for a positive torque connection. Includes 3mm hex key tool with every lugged transformer.

Finish

Stainless Steel finish is standard.

Warranty

10-year warranty against manufacturer's defects.

Features & Benefits

- True LED transformer
- 15 Amp resettable breaker for true LED protection
- Light Logic[™] ready
- · SNPC ready
- Locking door
- Stainless steel construction
- · 6 foot power cord · 10-year warranty

TÜV Rheinlar UL 1598:2008 R10.12 CAN/CSA-C22.2 No. 250.0-08 +Gl1 + Gl2 (R2013)

