



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 2350 Landscape Series • Brass & Copper • Up & Accent Lights

#### FIXTURE SPECIFICATIONS:

**HOUSING:**

Machined solid brass.

**SHROUD:**

Machined, solid brass fitted to the housing with dual silicone o-ring gaskets – providing a superior weather-tight seal.

**FINISH:**

Natural Brass and Olde Brass

**SOCKET/LAMP HOLDER:**

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

**LENS:**

Clear or frosted convex glass lens. Optical effect lenses are available; see accessories column on fixture ordering information chart.

**LAMP TYPE:**

- MR-16 Halogen – 50W maximum. LN-20 BAB (20W) Standard.
- MR-16 LED Lamp - 36° Flood, 4.5W is standard.

**MOUNTING:**

Solid brass adjustable knuckle with 1/2" NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, tree-mount boxes, or mounting canopies. Please see fixture ordering information for mounting selection.

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**


Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to the supply cable.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

#### DIMENSIONS:

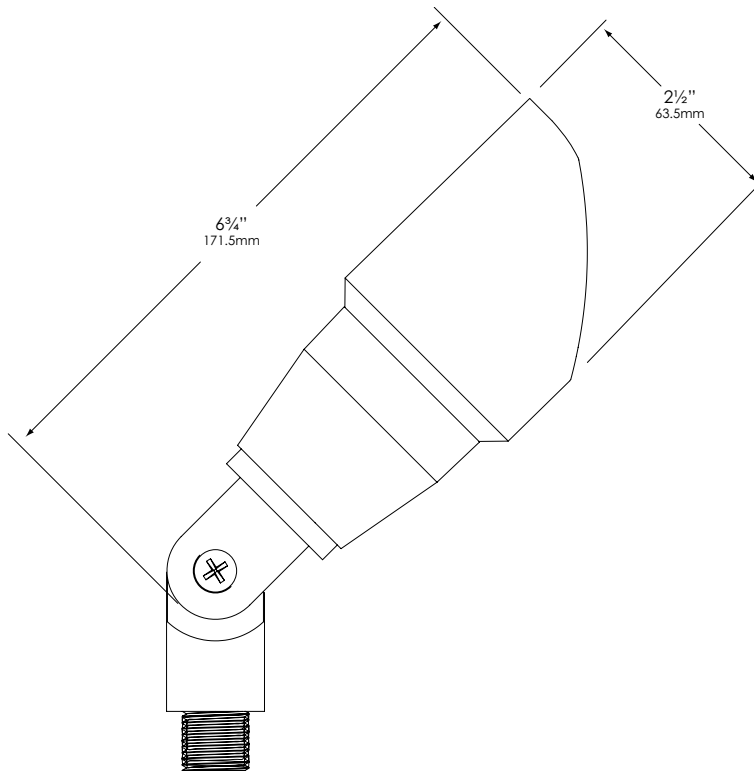

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# SPECIFICATION SHEET

## MODEL 2350 Landscape Series • Brass & Copper • Up & Accent Lights

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: GR-2350-BSN-BAB-CFR**

MOUNTING	MODEL	FINISH	LAMP	ACCESSORIES
GR- ABS ground stake WB- Brass wall mount canopy	2350	BSN - Natural Brass BSO - Olde Brass	BAB - 20W  LN-20 BAB Standard Halogen  4.5-W-36 - 4.5W  LN16-4.5-W-A-36-LED Standard LED  <i>(Please see lamp order code column in lamp guide of Vista product catalog)</i>	CFR – Convex Frosted lens HL - Honeycomb louver

Fixtures shipped with standard lamp, unless otherwise specified.  
Fixtures shipped with specified mounting hardware.