



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 4005 Landscape Series • Path & Spread Lights

#### FIXTURE SPECIFICATIONS:

**HOUSING:**

Die-cast, copper-free aluminum.

**SHROUD:**

Die-cast, copper-free aluminum fitted to housing with a silicone O-ring gaskets – providing a superior weather-tight seal.

**STEM:**

1/2" schedule-40 aluminum pipe with 1/2" NPT

**FINISH:**

Durable powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

**LENS:**

Clear, tempered, shock and heat-resitant, soda-lime glass lens.

**LAMP TYPE:**

MR-16 LED Lamp Only - 36° Flood, 4.5W is standard.

**Optics:**

Available in 15° Narrow Spot, 25° Spot, 36° Flood, or 60° Wide Flood distributions.

**AIMING:**

Adjustable swivel provides 360° of full circle rotation.

**MOUNTING:**

Bottom of stem threaded with 1/2" NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, floor mounting canopies or architectural canopies. Architectural canopies are ideal for use in extending fixtures from and projecting back light signs, wash walls and provide accents to facades..

**FASTENERS:**


All fasteners are stainless steel.

**WIRING:**

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

#### DIMENSIONS:

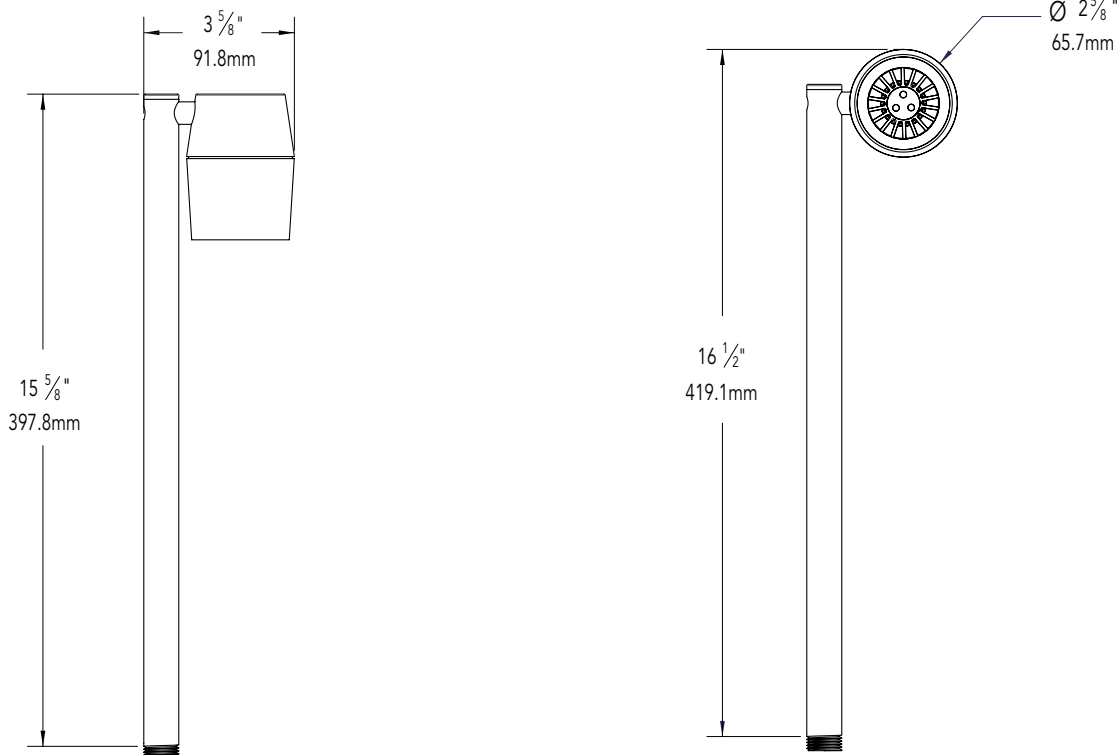

*Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.*



# SPECIFICATION SHEET

## MODEL 4005 Landscape Series • Path & Spread Lights

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: ML-4005-B-4.5-W-25-SL**

MOUNTING	MODEL	FINISH	WATTAGE	COLOR TEMP	DISTRIBUTION	ACCESSORIES
<b>ML</b> - ABS ground stake <b>AC</b> - Arcitectural canopy	<b>4005</b>	Standard	4.5	W - Warm	<b>15</b> - 15° Narrow Spot <b>25</b> - 25° Spot <b>36</b> - 36° Flood <b>60</b> - 60° Wide Flood	<b>FR</b> - Frosted Lens <b>BL</b> - Flat Cool Blue Lens <b>SL</b> - Flat Spread Lens <b>DBL</b> - Flat Dark Blue Lens <b>GL</b> - Flat Dark Green Lens <b>RL</b> - Flat Red Lens <b>YL</b> - Flat Amber Lens <b>HL</b> - Honeycomb Louver
		B - Black	5.5			
		Z - Architectural Bronze				
		DZ - Dark Bronze				
		GT - Granite				
		W - White				
		Premium				
		BR - Architectural Brick				
		LZ - Light Bronze				
		SB - Special Bronze				
		GG - Glossy Gray				
		R - Rust				
		HG - Hunter Green				
WB - Weathered Bronze						
WI - Weathered Iron						
GM - Graphite Metallic						
Hand Finished						
G - Verde						
P - Pewter						
M - Mocha						
OF - Olde Finish						

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.