



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 5014i-BSO Landscape Series • Brass & Copper • Up & Accent Lights

#### FIXTURE SPECIFICATIONS:

**HOUSING:**

Die-cast, brass.

**SHROUD:**

Die-cast, brass fitted to housing with a silicone O-ring gaskets – providing a superior weather-tight seal.

**FINISH:**

Olde Brass

**LENS:**

Clear, tempered, shock and heat-resistant, soda-lime glass lens.

**LED:**

COB Array driven at 1.5 watts - 2.5W or 3.5W . Color temperature available in W-Warm (3000K), N-Neutral (4000K), C-Cool (5000K).  
180-400 Delivered Lumens.

**ELECTRICAL:**

Input voltage range 9-15V AC regulated to achieve uniform illumination throughout the cable run of fixtures.

**OPTICS:**

Available in 25° Spot, 36° Medium Flood and 60° Wide Flood.

**MOUNTING:**

Die-cast brass adjustable knuckle with ½" NPS thread. Fixture may be mounted into threaded hubs in junction boxes, ground stakes (GR), tree mount boxes (TR), or mounting canopies (WR).

**FASTENERS:**



All fasteners are stainless steel.

**WIRING:**

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

Designed and Assembled **IN THE U.S.A.**

#### DIMENSIONS:

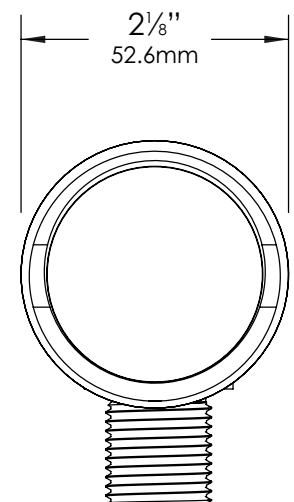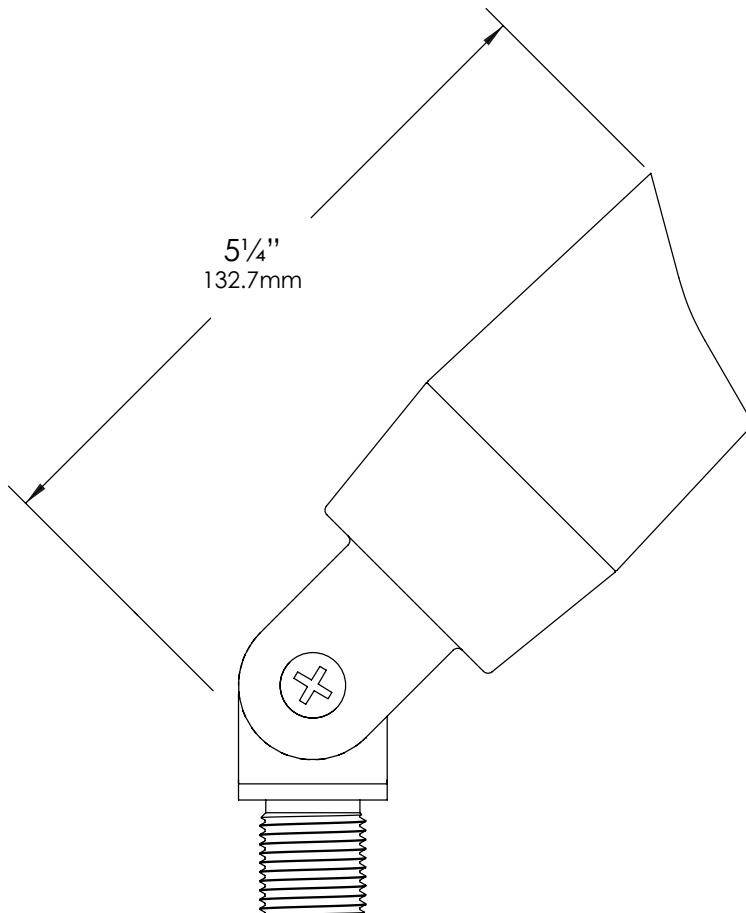

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL  
OUTDOOR LIGHTING

## SPECIFICATION SHEET

### MODEL 5014i-BSO Landscape Series • Brass & Copper • Up & Accent Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: GR-5014i-BSO-2.5-W-SP-FR

MOUNTING	MODEL	FINISH	WATTAGE	COLOR TEMP	DISTRIBUTION	ACCESSORIES
GR- ABS ground stake WR- Wall-mount canopy TR- Tree-mount junction box	5014i	BSO - Olde Brass	1.5 2.5 3.5	W - Warm N - Neutral C - Cool	SP- 25° Spot MF - 36° Flood WF - 60° Wide	FR - Frosted Lens LSF - Linear Spread Lens

Fixtures shipped with specified mounting hardware.

#### LUMEN OUTPUT PACKAGES



Beam Spread	A
NS	1.5 Watts 180 Lumens
MF	2.5 Watts 300 Lumens
WF	3.5 Watts 400 Lumens

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.