



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 5014i Landscape Series • Up & Accent Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

SHROUD:

Die-cast, copper-free aluminum fitted to housing with a silicone O-ring gaskets – providing a superior weather-tight seal.

FINISH:

Durable powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

LENS:

Clear, tempered, shock and heat-resistant, soda-lime glass lens.

LED:

COB Array driven at 1.5 watts - 2.5W or 3.5W . Color temperature available in W-Warm (3000K), N-Neutral (4000K), C-Cool (5000K).

180-400 Delivered Lumens.

ELECTRICAL:

Input voltage range 9-15V AC regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

OPTICS:

Available in 25° Spot, 36° Medium Flood and 60° Wide Flood.

MOUNTING:

Injection-molded composite adjustable knuckle with 1/2" NPS thread. Fixture may be mounted into threaded hubs in junction boxes, ground stakes (GR), tree mount boxes (TR), or mounting canopies (WR).

FASTENERS:


All fasteners are stainless steel.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are [MADE IN U.S.A.](#)

DIMENSIONS:

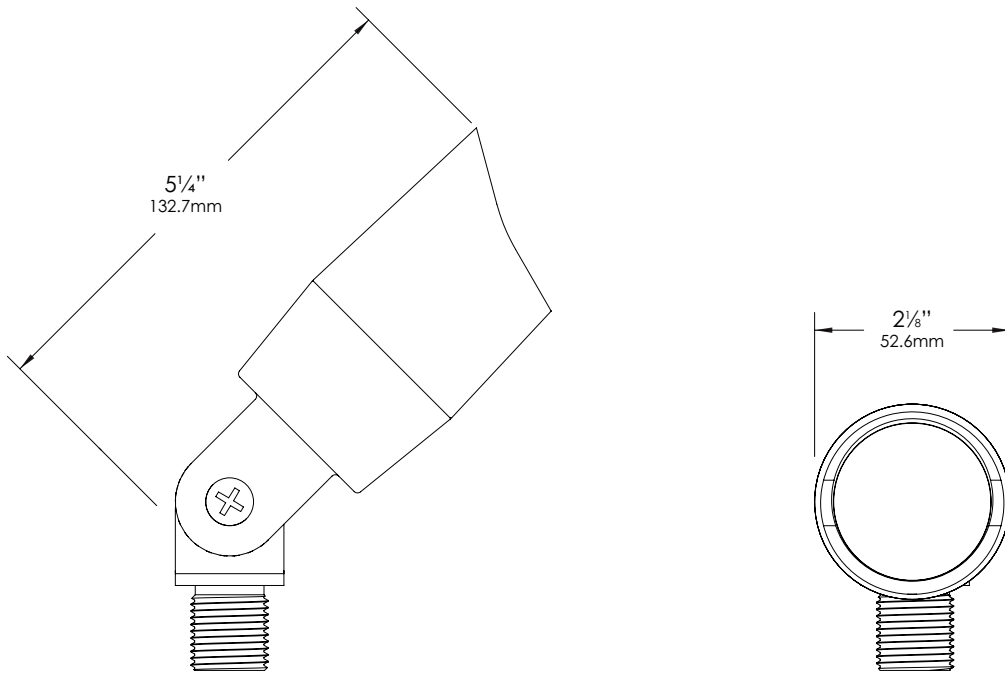

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL
OUTDOOR LIGHTING

SPECIFICATION SHEET

MODEL 5014i Landscape Series • Up & Accent Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: GR-5014i-B-2-W-SP-FR

| MOUNTING | MODEL | FINISH | WATTAGE | COLOR TEMP | DISTRIBUTION | ACCESSORIES |
|--|-------|--------------------------|---------|-------------|----------------|-------------------|
| GR- ABS ground stake WR- Wall-mount canopy TR- Tree-mount junction box | 5014i | Standard | 1.5 | W - Warm | SP- 25° Spot | FR - Frosted Lens |
| | | B - Black | 2.5 | N - Neutral | MF - 36° Flood | |
| | | Z - Architectural Bronze | 3.5 | C - Cool | WF - 60° Wide | |
| | | DZ - Dark Bronze | | | | |
| | | GT - Granite | | | | |
| | | W - White | | | | |
| | | Premium | | | | |
| | | BR - Architectural Brick | | | | |
| | | LZ - Light Bronze | | | | |
| | | SB - Special Bronze | | | | |
| | | GG - Glossy Grey | | | | |
| | | R - Rust | | | | |
| | | HG - Hunter Green | | | | |
| | | WB - Weathered Bronze | | | | |
| | | WI - Weathered Iron | | | | |
| | | GM - Graphite Metallic | | | | |
| | | Hand Finished | | | | |
| | | G - Verde | | | | |
| | | P - Pewter | | | | |
| | | M - Mocha | | | | |
| | | OF - Olde Finish | | | | |

Fixtures shipped with specified mounting hardware.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL
OUTDOOR LIGHTING

SPECIFICATION SHEET

MODEL 5014i Landscape Series • Up & Accent Lights

LUMEN OUTPUT PACKAGES



| Beam Spread | A |
|-------------|-------------------------|
| NS | 1.5 Watts 180 Lumens |
| MF | 2.5 Watts 300 Lumens |
| WF | 3.5 Watts 400 Lumens |

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.