



PROFESSIONAL
OUTDOOR LIGHTING

SPECIFICATION SHEET

Type:

Model:

Project:

MODEL 6508 Landscape Series • Path & Spread Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

STEM:

¼" schedule-40 aluminum pipe with ½" NPT custom bushing designed with a stress-dispersing collar, to provide strength and stability for mounting.

FINISH:

Polyester powder-coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Grey, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

SOCKET/LAMP HOLDER:

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

LENS:

Clear, high-impact, polycarbonate lens.

LAMP TYPE:

T3 – 20W max. LN-10 T3 Halogen (10W) Standard.

MOUNTING:

Bottom of stem threaded with ½" NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or floor-mounting

canopies. Please see fixture ordering information for mounting selection.

FASTENERS:

All fasteners are stainless steel.

WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.


CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

All Vista luminaires are [MADE IN U.S.A.](#)

This fixture is also available as a LED luminaire. Please refer to LED Specification Sheet - 6508-LED.

DIMENSIONS:

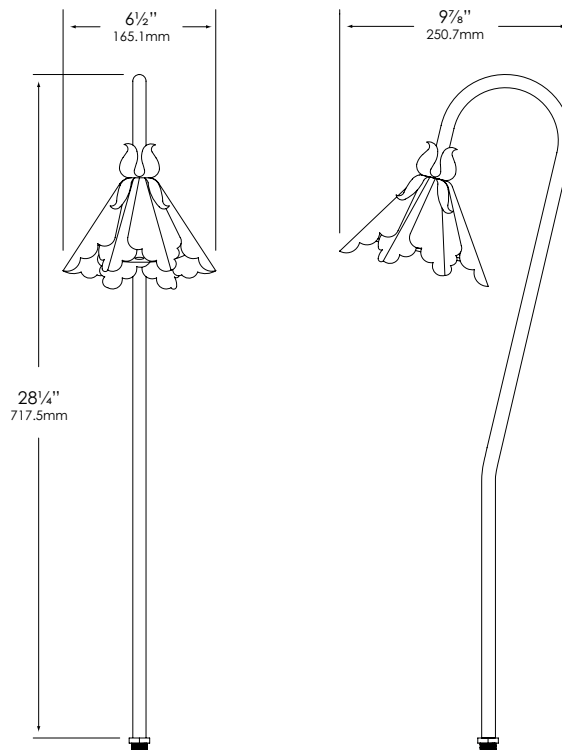

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



**PROFESSIONAL
OUTDOOR LIGHTING**

SPECIFICATION SHEET

MODEL 6508 Landscape Series • Path & Spread Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: PR-6508-B-10T3

MOUNTING	MODEL	FINISH	LAMP
PR - ABS ground stake	6508	Standard	10T3 - 10W
		B - Black	T3 Halogen
		Z - Architectural Bronze	20W Maximum
		DZ - Dark Bronze	LN-10 T3 Halogen (10W) Standard
		GT - Granite	2.5-W-T3
		W - White	LNT3-2.5-W-G-LED
		Premium	W-LB2ND - Warm 2.5W
		BR - Architectural Brick	N-LB2ND - Neutral 2.5W
		LZ - Light Bronze	C-LB2ND - Cool 2.5W
		SB - Special Bronze	W-LB5ND - Warm 5W
		GG - Glossy Gray	N-LB5ND - Neutral 5W
		R - Rust	C-LB5ND - Cool 5W
		HG - Hunter Green	
		WB - Weathered Bronze	
		WI - Weathered Iron	(Please see lamp order code column on lamp guide, Vista product catalog.)
		GM - Graphite Metallic	
		Hand Finished	
		G - Verde	
		P - Pewter	
		M - Mocha	
		OF - Olde Finish	

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.