


MR8

DESCRIPTION

The Brilliance LED MR8 Bipin is designed to better fit into standard, low voltage, MR8 fixtures and have a longer lamp life. These LEDs are thermally engineered to operate in enclosed fixtures and provide added security by automatically cooling down, and reducing lumen output when exposed to extreme heat (air temperatures above 125°F). There is no color shift when lumen output is reduced.

FEATURES

- Gen 5 earth tone colored housing
- Dimmable with most magnetic transformers
- Enhanced ESD (Electro-Static Discharge) protection (IEC-61000-4-2)
- Heat overload protection technology
- Fully potted PC board
- UL & FCC compliant

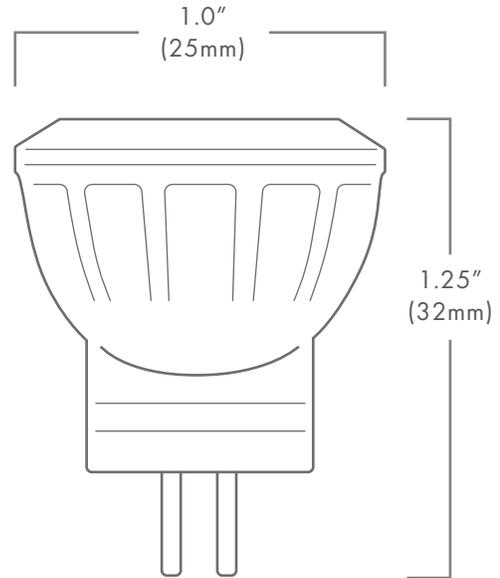

Part Number: **MR8-XXXX-XXX**

Kelvin/
Color | Beam spread

Wattage	1.5
Lumens	90
Beam Spread	15°, 30°, 60°, 120°
Kelvin Temperature	2200, 2700, 3000, 5700
Color	Red, Green, Blue, Amber
Operating Range	8-25 VAC
Replaces	10W Halogen
CRI	85
IP	61
Chipset	CREE
Lamp Life (hours)	50,000
Warranty (years)	5

