

BRYCE PERFORATED

Hanging Down Light for AR11 or MR16



DESCRIPTION

In a longer footprint than the original Bryce Hanging Down Light, the Bryce Perforated Hanging Down Light keeps the same one-piece construction and adds ambiance with its precision machined perforations.

Part Number: **BRYCE-HDL-MR16-PERF-BR-(NL)**

-MR16-PERF-BR-BLK-(NL)

-MR16-PERF-CU-(NL)

-AR11-PERF-BR-(NL)

-AR11-PERF-BR-BLK-(NL)

-AR11-PERF-CU-(NL)

BRYCE PERFORATED HANGING DOWN LIGHT

Use	Downlighting Techniques in Trees or Architecture by Hanging on a Chain or Cable
Includes	LightingShrink Professional Crimp and Heat Shrink Cable Connector When Purchased with a Lamp, Includes: MR16, 4W, 2700K, 60° AR11, 2W, 2700K 60°
Lamp	AR11, MR16, or Chameleon MR16 for RGBW Applications
Finish	Brass, Copper, or Black Brass (Cerakote®)




Brass (BR)



Copper (CU)



Black Brass + Cerakote®
(BR-BLK)

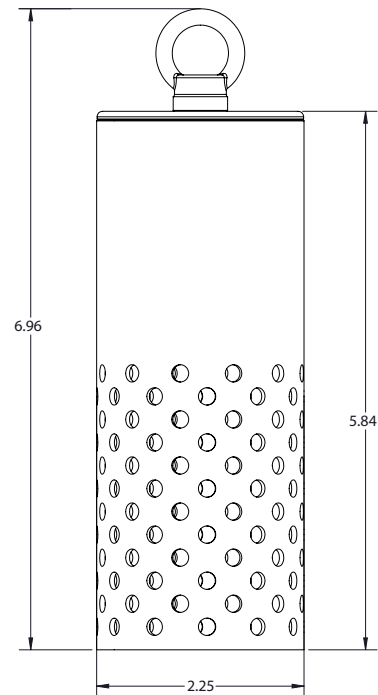



BRYCE-HDL-MR16-PERF-BR

INSTALLING THE FIXTURE

1. Unscrew the fixture body from the base.
2. Install the lamp in the socket.
3. Reinstall the fixture body.

HANGING THE FIXTURE

- **IMPORTANT: DO NOT INSTALL ON OR NEAR ANY HIGH VOLTAGE POWER LINES**
1. Hang the fixture from a secure stainless steel eye bolt, with or without a chain.
 2. Create a drip loop with the wire by bending the wire to a slope one inch below the fixture cap.