

SPECIFICATION SHEET

PRODUCT # : CL-347B-AB

• Step Lights

• Cast Brass Face Plate

Fixture Specifications:

Housing: Injected molded composite for high UV stability.

Face Plate: Diecast brass, fitted to housing with silicone "O" ring gasket.

Face Plate Finish : **AB- Antique Bronze.**
Natural toning process. AB finish will vary due to artistic process.

Lens: Frosted and heat resistant flat glass.

Socket: Top grade adjustable ceramic bi-pin socket with retention clip and teflon-jacketed wire lead.

Lamp: 12V, MR-16 halogen, 50W max. L-BAB-C20 (20w) standard. See below for available LED lamps.

Gasket: Silicone "O" ring seals faceplate to housing providing weather tight protection.

Wiring:

Fixture is prewired with a 3-ft 18-2 SJT-W direct burial cord. Wire connector available separately. Gel filled wire nut CX-854 may be ordered to Corona Lighting.

Mounting:

In-ground direct burial or concrete encasement.

Electrical Notes: A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V.

Warranty:



Limited lifetime warranty on fixture Brass face plate and ten (10) years on housing against manufacturer's defects.



Fixture socket
tilts for $\pm 25^\circ$



3.5W, 5W and 7W

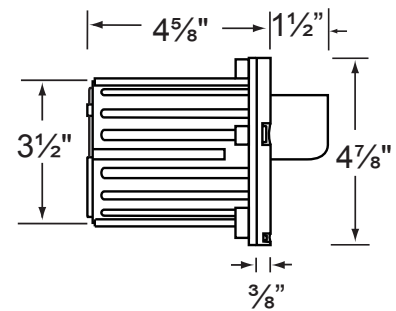

AVAILABLE LED LAMPS

| LAMP NUMBER | WATTS | BRAND | BEAM | | COLOR & TEMP. | ORDER CODE |
|-------------------|-------|---------|----------------|-------|---------------|---------------|
| | | | SPREAD | LUMEN | | |
| L-EDMR16-EP-3W-FL | 3.5 | EPISTAR | 45° Flood | 210 | WW 2700K | MR16-EP-3W-FL |
| L-EDMR16-EP-5W-FL | 5 | EPISTAR | 45° Flood | 270 | WW 2700K | MR16-EP-5W-FL |
| L-EDMR16-3W-WW-SP | 3.5 | CREE | 15° Spot | 210 | WW 2700K | MR16-3W-WW-SP |
| L-EDMR16-3W-WW-FL | 3.5 | CREE | 45° Flood | 210 | WW 2700K | MR16-3W-WW-FL |
| L-EDMR16-3W-WW-WF | 3.5 | CREE | 60° Wide Flood | 210 | WW 2700K | MR16-3W-WW-WF |
| L-EDMR16-5W-WW-SP | 5 | CREE | 15° Spot | 270 | WW 2700K | MR16-5W-WW-SP |
| L-EDMR16-5W-WW-FL | 5 | CREE | 45° Flood | 270 | WW 2700K | MR16-5W-WW-FL |
| L-EDMR16-5W-WW-WF | 5 | CREE | 60° Wide Flood | 270 | WW 2700K | MR16-5W-WW-WF |
| L-EDMR16-7W-WW-SP | 7 | CREE | 15° Spot | 430 | WW 2700K | MR16-7W-WW-SP |
| L-EDMR16-7W-WW-FL | 7 | CREE | 45° Flood | 430 | WW 2700K | MR16-7W-WW-FL |
| L-EDMR16-7W-WW-WF | 7 | CREE | 60° Wide Flood | 430 | WW 2700K | MR16-7W-WW-WF |

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: