


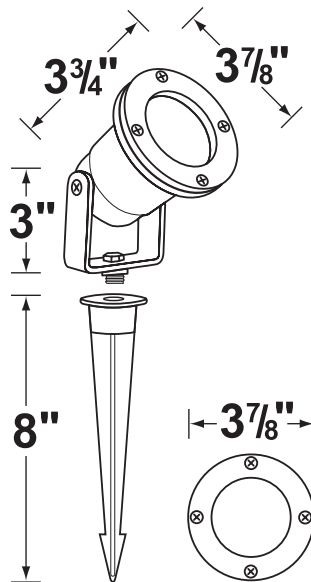



CL-511			
Product Specification Sheet			
HOUSING:	Die-cast aluminum.		
FINISH:	Polyester UV powder coated, available in BK-Black .		
LENS:	Clear, tempered, and heat resistant glass with silicone gasket. See accessories & parts for special effect lenses, honeycomb louver and frosted lens CX-380-FR.		CX-854 DIRECT BURIAL WIRENUT AVAILABLE
LAMP TYPE:	12V, MR-16 halogen, 50W max. See lamp guide for LED and color MR-16 lamps.		
MOUNTING:	Yoke mounted on ground spike. Wire connector excluded.		
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		
			
			Tel: 800-727-9262 213-747-4500 Fax: 800-727-9957 213-747-3234

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.