

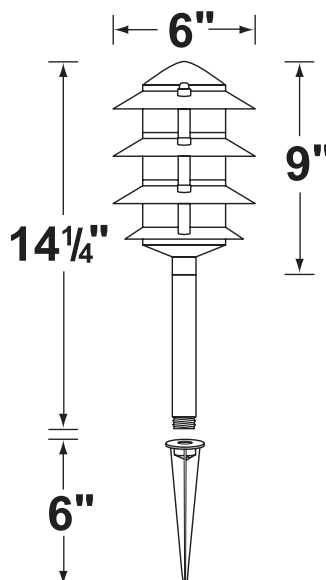



<b>CL-604</b>			<p><b>CL-604</b></p>	
<b>Product Specification Sheet</b>				
<b>HOUSING:</b>	Interlocking die-cast aluminum sections, assembled with 3 stainless steel screws.			
<b>FINISH:</b>	Polyester UV powder coated, available in <b>BK</b> -Black, <b>GR</b> -Green, <b>VG</b> -Verde Green.			
<b>LENS:</b>	Frosted tempered glass with silicone gasket.  Clear glass lens available.			
<b>LAMP TYPE:</b>	12V, T3/T4 halogen, 50W max.  See lamp guide for T3 xenon lamps.			
<b>MOUNTING:</b>	6" cast aluminum stem with 1/2" NPT on bottom, including ground spike.  See accessories & parts for optional mounting hardware. When ordering with 3" post top or pier mount base add "-PT" or "-PM" to the end of the product number respectively.			
<b>WIRING:</b>	Fixture is prewired with a 3-foot pigtail of direct burial cable.			

**CORONA**  
Lighting

[WWW.CORONALIGHTING.COM](http://WWW.CORONALIGHTING.COM)

Tel: 800-727-9262  
213-747-4500

Fax: 800-727-9957  
213-747-3234

- Fixture is supplied with 20W T3 halogen lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.