

SPECIFICATION SHEET

PRODUCT # : CL-647C-RC

•Area Lights

•Solid Copper

Fixture Specifications:

Housing: Corrosion resistant solid copper.

Stem: Solid copper pipe with 1/2" NPT on bottom.

Finish: **RC- Raw Copper.** Will age gradually over time.

Lens: Frosted polycarbonate, cover over lamp providing sprinkler water protection.

Socket: Top grade fixed ceramic bi-pin socket. Easy tool free lamp access.

Lamp: 12V, T3 halogen, 20W max. L-10T3 (10w) standard. LED lamps available in 1W and 4W- 3000k color temperature. Xenon lamps available in 10W and 20W

Wiring:



Fixture is prewired with a 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.

Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes: A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 10V-14V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty:

Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

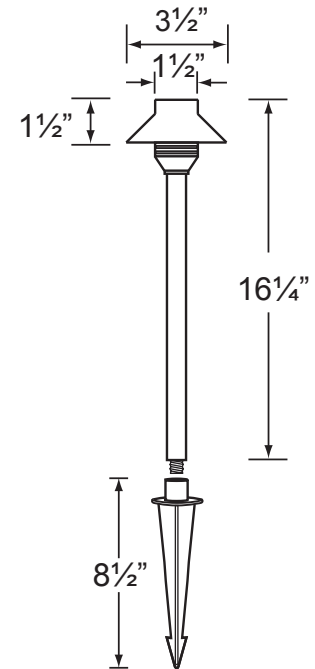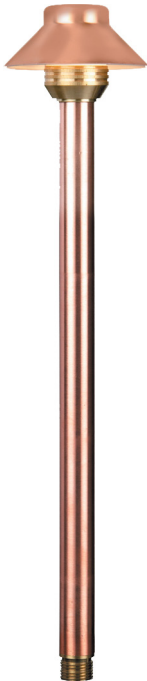

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Stems

CX-682C-RC 6"
CX-683C-RC 12"
CX-684C-RC 18"
CX-685C-RC 24"
RC - Raw Copper



Mounting Canopy

CX-709B-BR
BR- Natural Brass



Mounting Pedestal

CX-603-BK
BK - Black

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: