

SPECIFICATION SHEET

PRODUCT # : CL-650B-AB

•Area Lights

•Cast Brass

Fixture Specifications:

Housing: Corrosion resistant cast brass.

Stem: Solid brass pipe with 1/2" NPT on bottom.

Finish: **AB- Antique Bronze.** Natural toning process.
AB finish will vary due to artistic process.

Lens: Frosted polycarbonate, cover over lamp providing
sprinkler water protection.

Socket: Top grade fixed ceramic bi-pin socket. Easy tool
free lamp access.

Lamp: 12V, T3 halogen, 20W max. L-10T3 (10w) standard.
LED lamps available in 1W and 4W- 3000k color
temperature. Xenon lamps available in 10W and 20W

Wiring:


Fixture is prewired with a 18-2 SPT2-W direct
burial cord. Wire connector available separately.
Universal connector CX-839 or gel filled wire nut
CX-854 may be ordered to Corona Lighting.

Mounting Spike: Standard injection molded spike with 1/2" NPT
threaded female hub.

Electrical Notes: A remote 12V transformer required, may be
ordered to Corona Lighting separately. Voltage
range for 12V halogen lamps are 11V-12.5V.
Voltage range for LED lamps are 10V-14V.
Proper grease/lubricant is suggested on
threaded parts during installation process.

Warranty:

Limited lifetime warranty on fixture housing and
stem against manufacturer's defects.

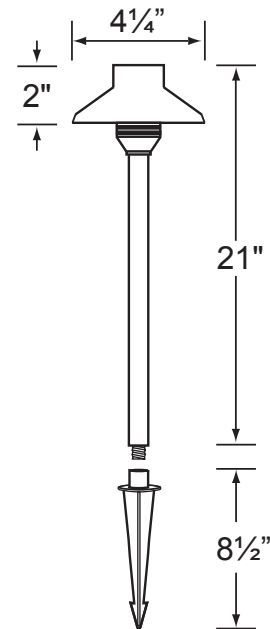

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Stems

CX-682B-AB 6"
CX-683B-AB 12"
CX-684B-AB 18"
CX-685B-AB 24"
AB - Antique Bronze



Mounting Canopy

CX-709B-AB
AB- Antique Bronze



Mounting Pedestal

CX-603-BK
BK - Black

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: