

SPECIFICATION SHEET

PRODUCT # : CL-730B-T-AB

•Path Lights

•Cast Brass

Fixture Specifications:

Housing & Shrouds: Corrosion Resistant Cast Brass.
Shrouds are adjustable and extendable.

Stem: Solid brass pipe with 1/2" NPT on bottom.

Finish: **AB- Antique Bronze.** Natural toning process.
AB finish will vary due to artistic process.

Lens: Clear and heat resistant flat glass.

Socket: Top grade fixed ceramic bi-pin socket, with lamp
retension clip to securely hold lamp in place.

Lamp: 12V, MR-8 halogen, 2x20W max.
L-CMP-20 (2x20w) standard. 2x10w lamps available.

Gasket: Silicone gasket for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw

Wiring:





Fixture is prewired with a 18-2 SPT2-W direct
burial cord. Wire connector available separately.
Universal connector CX-839 or gel filled wire nut
CX-854 may be ordered to Corona Lighting.

Mounting Spike: Standard injection molded spike with 1/2" NPT
threaded female hub.

Electrical Notes: A remote 12V transformer required, may be
ordered to Corona Lighting separately. Voltage
range for 12V halogen lamps are 11V-12.5V.
Proper grease/lubricant is suggested on
threaded parts during installation process.

Warranty:

Limited lifetime warranty on fixture housing and
stem against manufacturer's defects.

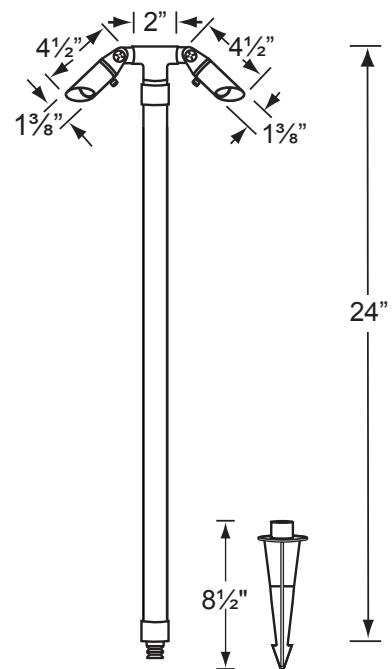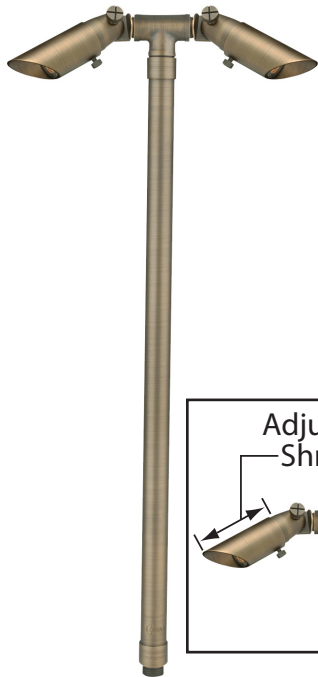

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Stems

CX-682B-AB 6"
CX-683B-AB 12"
CX-684B-AB 18"
CX-685B-AB 24"
AB - Antique Bronze



Mounting Canopy

CX-709B-AB
AB- Antique Bronze



Mounting Pedestal

CX-603-BK
BK - Black

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: