

SPECIFICATION SHEET

PRODUCT # : CL-740C-T-RC

•Path Lights

•Solid Copper

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Solid Copper.

Stem: Solid copper pipe with 1/2" NPT on bottom.

Finish: RC- Raw Copper. Will age gradually over time.

Lens: Clear and heat resistant flat glass.

Socket: Top grade loose ceramic bi-pin socket, spring loaded design.

Lamp: 12V, MR-16 halogen, 2x35W max. L-BAB-C20 (2x20w) standard. LED lamps available in 3.5W and 5W- 2700K color temperature. Available in 15°, 45°, 60° beam spreads for Cree and 45° for Epistar brands.

Gasket: Silicone double gasketed for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw

Wiring:

Fixture is prewired with a 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.

Mounting Spike:



Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes:

A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.


Warranty:

Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

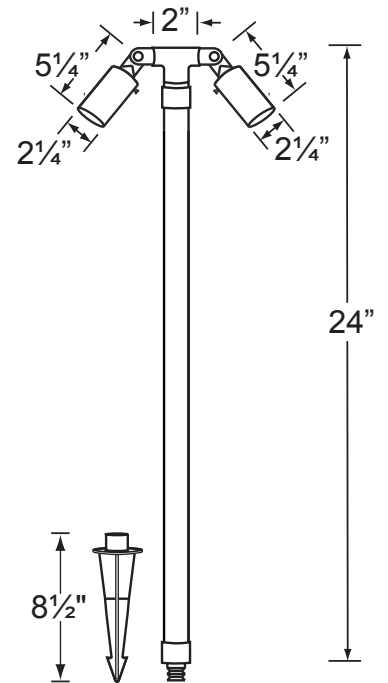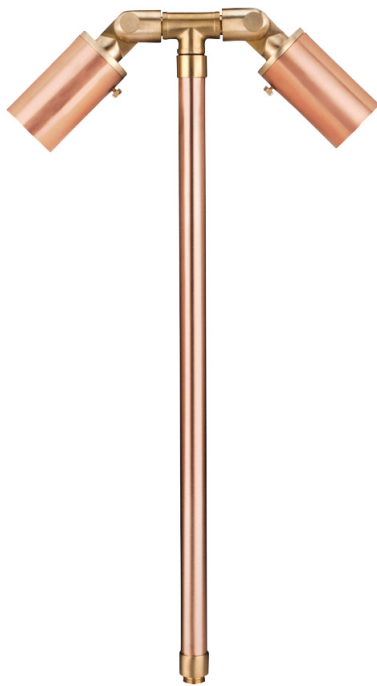

3.5W and 5W

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Stems

CX-682C-RC 6"
CX-683C-RC 12"
CX-684C-RC 18"
CX-685C-RC 24"

RC - Raw Copper



Mounting Canopy

CX-709B-BR
BR- Natural Brass



Mounting Pedestal

CX-603-BK
BK - Black

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: