

CARLSBAD



DESCRIPTION

The Brilliance Carlsbad Well Light comes in two variations: a flat top and angled top. The Carlsbad is fitted for any of our MR16 lamps and really comes to life with the new Chameleon MR16. The flat brass top comes in a brass finish.

LAMP: Chameleon MR16 or MR16

FINISH: Machined copper, brass, or blackened brass

USE: Well Light

Part Number: **CARLSBAD-MR16-BR-(NL)**

CU-(NL)

BR-BLK-(NL)



Brass (BR)




Copper (CU)



Blackened Brass (BR-BLK)



2.37"

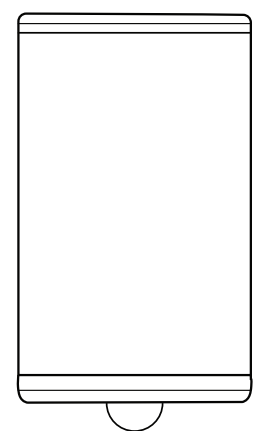

4.5"

2.37"



CARLSBAD-MR16-BR

INSTALLING THE LAMP

1. Remove the rear cap and pull out the spring.
2. Set the MR16 on top of the spring and plug into the socket.
3. Insert this assembly into the fixture body with the front of the lamp toward the lens.
4. Screw the back cap onto the fixture body and hand tighten.

INSTALLING THE FIXTURE

1. Dig a hole in the ground approximately 8" wide by 10" deep.
2. Connect the power cable to the fixture, leaving 2 feet of wire coiled in the bottom of the fixture for future service.
3. Pour 5" of pea gravel in the hole.
4. Place the fixture in the center of the hole.
5. Add more pea gravel to fill the hole 1" before the fixture lip. This will allow for proper drainage around the fixture.
6. Apply glass wax on top of the lens to protect against standing water.