



landscape • entertainment • architectural • hospitality • illumination

DL-09-SM SERIES DIRECTIONAL LIGHT





DIRECTIONAL LIGHTS DL-09-SM SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass mini directional flood light on matching cast aluminum or brass stake

LENS: High impact acrylic lens

LAMP SUPPLIED: 5w G4 bi-pin Xenon; 10,000 hours average rating (5w Max)

SOCKET: High temperature ceramic G4 with 250°C silicone lead wires


WIRING: Black 3 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03-RX-BLT (Aluminum models) or FA-03-RX-BRS (Brass models)

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available

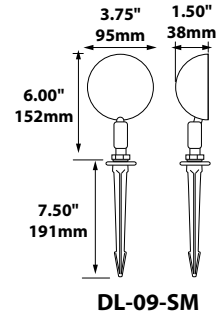

DL-09-SM-X-BRS

IP53




ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-09-SM-X-BLT	Aluminum Mini Directional Flood	5w G4 bi-pin Xenon	1.0 lbs.
DL-09-SM-X-BRS	Brass Mini Directional Flood	5w G4 bi-pin Xenon	1.0 lbs.

MOUNTING ACCESSORIES

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

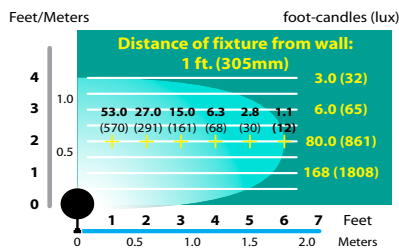

DL-09-SM Half Spread Photometrics

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT