

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Endurance™ Brick Lights Louver Step And Wall Light

Model & Voltage	Color Temp & CRI	Lumens	Finish
WL-5205 120 VAC	3000K 90	45	ABK Architectural Black ABZ Architectural Bronze AGH Architectural Graphite AWT Architectural White

Example: **WL-5205-30-ABK**

### DESCRIPTION

Designed for integration into brick walls or vertical risers. The energy-efficient Endurance LED Brick Light features a die-cast aluminum housing and integrated LED light engine with a heat resistant opal glass diffuser for a glare-free even spread of light, making outdoor areas safer and more secure.

### FEATURES


- Glare controlling die-casted aluminum louver
- Factory sealed LED light engine
- 5 year warranty

### SPECIFICATIONS


<b>Construction:</b>	Die-cast aluminum (K-Alloy)
<b>Power:</b>	5.5W
<b>Input:</b>	120 VAC, 50/60Hz
<b>Dimming:</b>	ELV: 100-10%
<b>Light Source:</b>	Integrated LED
<b>Rated Life:</b>	80000 Hours
<b>Mounting:</b>	Mortar into masonry, screw into wood walls, or retrofit into existing brick light installations, Can be mounted on wall vertically or horizontally
<b>Cut Out:</b>	3 1/4" x 8"
<b>Finish:</b>	Electrostatically Powder Coated Architectural White, Electrostatically Powder Coated Architectural Bronze, Electrostatically Powder Coated Architectural Graphite, Electrostatically Powder Coated Architectural Black
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP66, ADA



### FINISHES

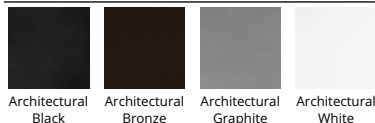

### LINE DRAWING

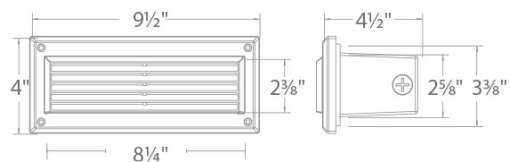

### REPLACEMENT PARTS

- 5205-COV-AWT - Louvered Cover Plate AWT
- 5005-PLATE - Mnt Plate for Light Engine
- 5205-COV-AGH - Louvered Cover Plate AGH
- 5205-COV-ABZ - Louvered Cover Plate ABZ
- 5205-COV-ABK - Louvered Cover Plate ABK