model IL600.150.500




Construction

- Dimensions 6" width x .5" height x 3" depth
- Stainless steel 20g alloy 304
- Unibody construction
- Integrated cleats for easy retrofits
- Lifetime Limited Warranty
- C/US UL Listed 1838 Low Voltage Landscape Lighting



Electrical

- Low voltage 12vAC operation
- Overmolded LED circuitry with renewable materials
- IP68 certified waterproof
- 2 watt energy consumption
- Output similar to 10 watts
- Lumen output 120
- 72" long 18/2 leads for connection
- Magnetic or electronic transformer compatible
- LED life expectancy up to 40,000 hours

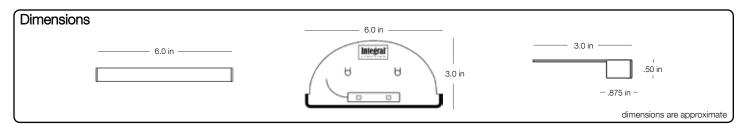

LED Color Outputs



add suffix .200 to model number



3000K pure white



4200K cool white add suffix .400 to model number

Fixture Finishes



IL600.150.500 Brushed Stainless Steel

