LUMIEN™

Together, we are brighter.

PROJECT: _____

TYPE: _____

CAT #: _____

LAB-180




UL LISTED

DESCRIPTION

Accessory, Brass - Raw, LumienACE Putting Green 6" PVC Cup & Flag Pole (M4B1 Module Not Included)

SPECIFICATIONS

Construction	Brass
Finish	Raw

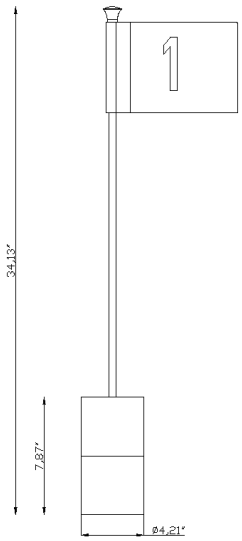

FINISHES

Raw

NOTES

Lumien Lighting

770-485-9002

orders@lumienlighting.com

www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

LUMIEN

ORDERING GUIDE

	MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
LAB-180 +	CORE: M4B1 - [ ] - [ ] - [ ] - [ ] +	**3.5W** **5.5W**	**2700K** **3000K**	**40°** **60°**	**A**	**Accessories - Pro Series (Optional)** **LP-REMOTE** LumienPRO Remote
LAB-180 +	PRO: M7B1 - [ ] - [ ] - [ ] - [ ] +	**4.5W**	**2700-5700K**	**40°** **60°**	**A**	
LAB-180 +	PRO: M8B1 - [ ] - [ ] - [ ] - [ ] +	**3W**	**2700-5700K**	**40°**	**A**	

MODULES

	CORE M4B1-3.5W-27K-40-A M4B1-3.5W-27K-60-A M4B1-3.5W-30K-40-A M4B1-3.5W-30K-60-A	CORE M4B1-5.5W-27K-40-A M4B1-5.5W-27K-60-A M4B1-5.5W-30K-40-A M4B1-5.5W-30K-60-A	PRO M7B1-4.5W-40-A M7B1-4.5W-60-A	PRO M8B1-3W-27K-40-A M8B1-3W-30K-40-A
Construction	Brass	Brass	Brass	Brass
Finish	Antique	Antique	Antique	Antique
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	3.5W (5.59)	5.5W (8.66)	4.5W (7.66)	3W (4.83)
Module Lumens	325 Lm	435 Lm	350 Lm	158 Lm
Color Temperature	2700K, 3000K	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	40°, 60°	40°, 60°	40°, 60°	40°
Lead Wire Length	6'	6'	6'	6'
CRI	80+	80+	80+	80+
RGB	No	No	No	Yes
Dimmable	Primary Dimming	Primary Dimming	Primary Dimming	Primary Dimming
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-

ACCESSORIES

Accessories - Pro Series



LP-REMOTE

LumienPRO Remote
(Functionality determined by the Light Fixture)