



## Palm Tree Ring Assembly

### Contents


- 2 halves of tree ring
- 5 Springs
- 5 Lag Bolts
- 10 Nuts
- 5 Overlap Washers
- 4 Brass Nipples

### Instructions


- Based on the size of your tree find the two corresponding pop outs on the 2 halves of the ring.



- Once you choose your preferred diameter cut out the correct pop outs

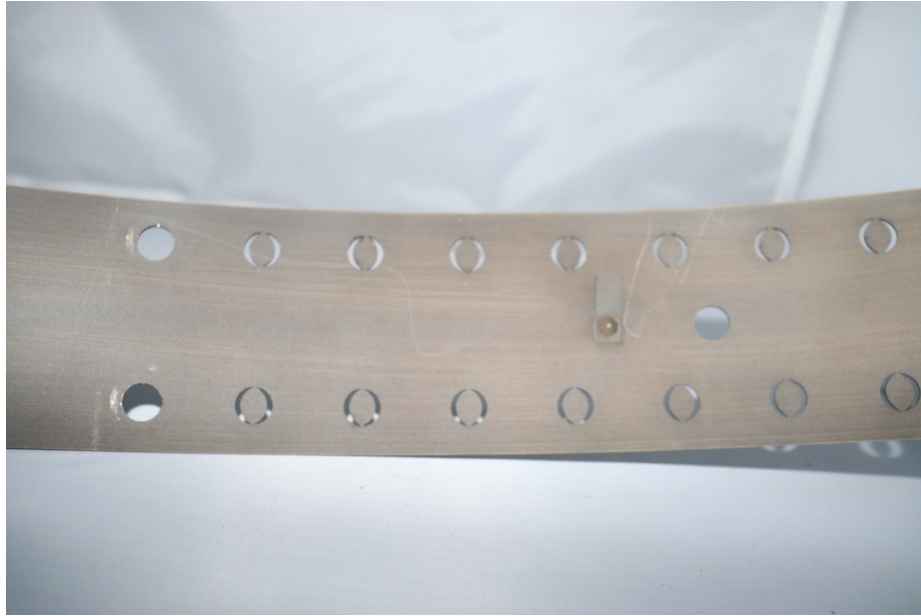

- Align the cut outs together with the cut outs on the inside of the ring. This should be done around the tree.

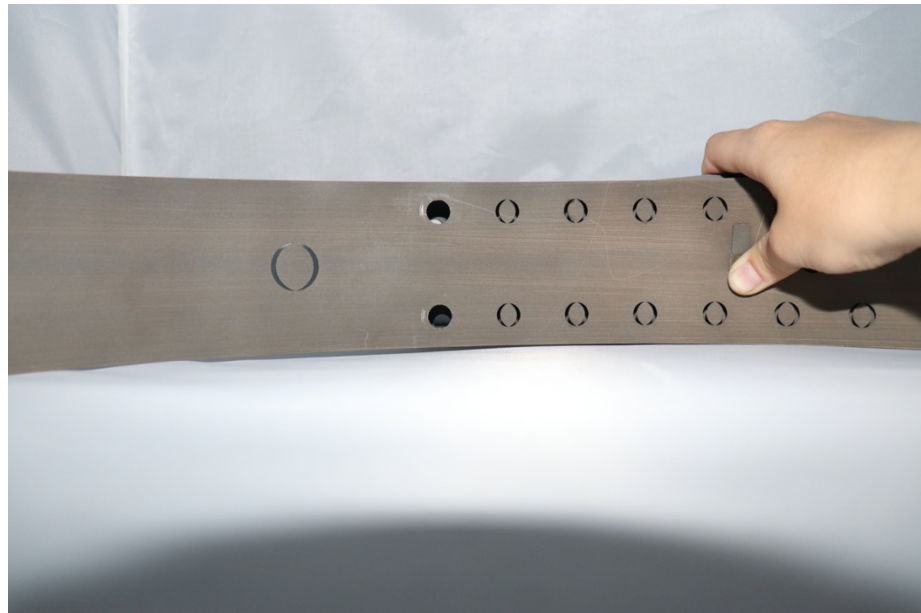

- Take 2 of the 4 Brass Nipples and connect both sides of the halves



- Use the lag bolts (depending on chosen size use 3 to 5 lag nuts) to secure to the trunk of the tree. Make sure that the ring is tightly secured to the tree. This can be done with or without the springs.





Once assembly is completed the tree ring should look like this, around a tree.



