

# UNIQUE LIGHTING SYSTEMS®

## Down Light Dome Mounted Down Light Odyssey™ Series



### QUASAR 2: 12V & 24V Brass Down Light

PROJECT:	
TYPE:	
CATALOG NUMBER:	
LAMP(S):	
NOTES:	


### FIXTURE ORDERING INFORMATION

Example: QUA2-12-35 (Quasar 2, 12 Volt, 35 Watt, 25' Wire Lead, Weathered Brass)

MODEL NAME	VOLTAGE	WATTAGE	WIRE LENGTH	FINISH	OPTIONS
QUA2	12=12 Volt 24=24 Volt	35= 35W Halogen NL=No Lamp	Leave blank for standard 25' length * 0= 3' wire lead * 50= 50' wire lead	leave blank for standard WB finish P= Standard powder coat finishes. List your desired color in the order comments area.	* 6P= Six Pack

**NOTE:** LED fixtures are available ONLY with a 25' wire lead. For additional painted finishes or six pack options contact our factory.

### DIMENSIONS:

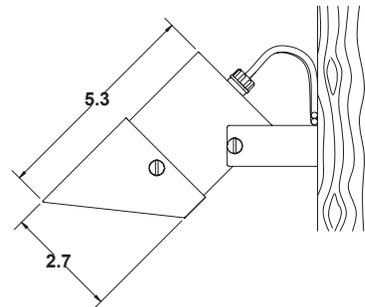

#### Powder Coated Finishes

Tucson Tan	TT
White**	WH
Black	BK
Verde Green	VG
Titanium Knight	TK

#### Standard Finish

Weathered Brass	WB
-----------------	----

Stock powder coated colors displayed are subject to varying lead-times and will incur an additional cost. A Limited Warranty applies to all powder coated products. Custom colors are available upon request. Please inquire about cost and lead times. Contact factory for custom colors and matching paint options.

**FLEX™** Unique Lighting Systems® fixtures are available with LED lamps. Please specify the lamp code when ordering.

\* Only available with the NL wattage option.

\*\* This fixture is available in White with No Lamp at no upcharge with a seven day lead time.

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.

### SPECIFICATIONS

#### Our Commitment

Unique Lighting Systems' highest commitment is to set the standard for manufacturing innovative and quality products. This commitment is evident through our detailed inspection processes and extensive field testing. From the initial design process of each product, to the final assembly of each custom-made individual part, our manufacturing process accomplishes the highest level of performance and durability carried through to final delivery to the end user. Durable construction and beautiful styling make Unique™ fixtures the ideal solution for any residential or commercial application. Unique Lighting™ already holds numerous product patents and we are constantly developing innovative ideas to help expand the lighting industry.

#### Body

Precision extruded brass.

#### Shroud

Precision extruded from brass. Accepts up to one additional lens/hex cell accessory.

#### Lens

Comes with a complete set of optical designer lenses including: spread lens, frosted, hex cell and blue lens for moonlighting effect.

#### Lamp

For use with a halogen lamp up to 35W MR16 lamp.

#### Electrical Requirements

A remote 12V or 24V transformer required, may be ordered separately from Unique Lighting Systems®. Voltage range for 12V halogen lamps is 10.8V to 12V. Voltage range for 24V halogen lamps is 21.6V to 24V.

#### Lamp Connection

Specification grade, beryllium copper lamp holder.

#### Wiring

Exclusive UF Intelli-Flex wire with anti-moisture migration connections. GU5.3 base.

#### Hardware

Brass mounting bracket included.

#### Finish

Exclusive weathered brass finish is standard. Unique™ Lightings' Weathered Brass finish is a "living finish" and will naturally patina and change over time. Polyester powder coat finishes are also available (see chart above).

#### Warranty

The Odyssey Family of products from Unique Lighting Systems® carries a limited lifetime warranty against manufacturer's defects.

#### Manufacturing

Manufactured to ISO 9001-2008 Quality Systems Standard



UL 2108:2004 R12.07  
CSA C22.2.9.0-96 (R2006)