

WAC LIGHTING

Rubix

5" & 10" Ceiling Mount 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|-----------------------------|------------------|-------------------|---------------------|---|
| FM-W2505 5" FM-W2510 10" | 3000K 90 | 16W 31W 30W | 945 2139 1875 | AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White |

Example: **FM-W2505-AL**

DESCRIPTION

This versatile Rubix model is available for both wall and ceiling mounting. Die-cast aluminum constructed with etched glass for durability in exterior environments, Rubix delivers a substantial lumen output with a minimalist design.

FEATURES


- Title 24 may not be available for all finishes, check for availability
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

| | |
|-----------------|---|
| Construction: | Die-cast Aluminum |
| Power: | 16W, 30W, 31W |
| Input: | 120-277V, 50/60Hz |
| Dimming: | ELV: 100-10% , 0-10V: 100-5% |
| Light Source: | Integrated LED |
| Rated Life: | 70000 Hours |
| Mounting: | Mounts directly to junction box, Can be mounted on ceiling or wall in all orientations |
| Finish: | Powder Coat Graphite:Graphite, Powder Coat Graphite::Brushed Aluminum, Powder Coat Graphite:::Black, Powder Coat Graphite:::Bronze, Powder Coat Graphite:::White, Electrostatically Powder Coated:Black, Electrostatically Powder Coated::Brushed Aluminum, Electrostatically Powder Coated:::Graphite, Electrostatically Powder Coated:::White, Electrostatically Powder Coated:::Bronze |
| Operating Temp: | -40°F to 122°F (-40°C to 50°C) |
| Standards: | ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant |



FINISHES:

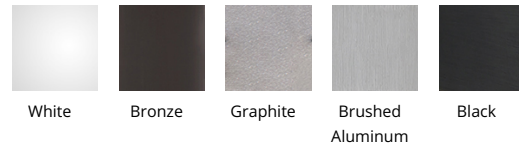

LINE DRAWING:

