LED BRICK LIGHTS
SL-50-LEDP SERIES

LED READY

TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or brass 1 louver brick light with stamped stainless steel surface mounting bracket - no back box required.

3 LENS OPTIONS:
SL-50-LEDP: Standard white acrylic; creates warm 2700K incandescent like color
SL-50-LEDP-SB: Sand Blast clear acrylic; creates soft 3000K halogen like color
SL-50-LEDP-CL: Clear acrylic; bright halogen 3000K color

GASKET: Black neosponge closed cell; .190" thickness

LIGHT SOURCE: 12v, 5w integrated flat panel LED with driver, warm white 3000K
350 lumens (3000K) / 380 lumens (5200K)

LIFETIME RATING: 50,000 hours

DRIVER: 4w output, 12v AC input. Maximum distance from fixture is 18 feet.
For use with magnetic transformers only

VOLTAGE RANGE: 9 to 18 volts. Optimum operating range of 10 to 15 volts for consistent performance and brightness.

WIRING: Red(+) and Black(-) 18 gauge zip cord from LED panel. Connects to external driver Red(+) and Black(-) 18 gauge zip cord.
Additional 6' 18/2 zip cord supplied for wiring external driver to main cable.
For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from LED driver to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: Stainless Steel surface mount bracket; two screws and wall anchors provided; Face plate attaches to bracket with two provided set screws

FINISH: Aluminum - Black texture polyester powder coat; optional finishes available
Brass - Unfinished; optional finishes available

CAUTION: MUST BE POWERED BY LOW VOLTAGE AC MAGNETIC TRANSFORMER ONLY

GO GREEN

SL-50-LEDP-CPR

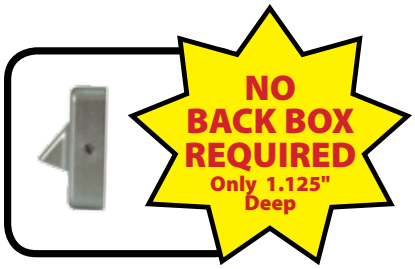

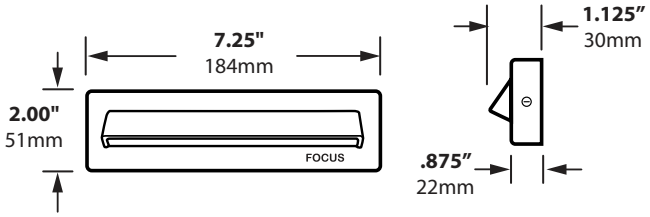

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
SL-50-LEDP-BLT	Cast Aluminum 1 Louver Flat Panel LED Brick Light, Standard White Lens	1.0 lbs.
SL-50-LEDPSB-BLT	Cast Aluminum 1 Louver Flat Panel LED Brick Light, Sand Blast Lens	1.0 lbs.
SL-50-LEDPCL-BLT	Cast Aluminum 1 Louver Flat Panel LED Brick Light, Clear Lens	1.0 lbs.
SL-50-LEDP-BRS	Cast Brass 1 Louver Flat Panel LED Brick Light, Standard White Lens	2.0 lbs.
SL-50-LEDPSB-BRS	Cast Brass 1 Louver Flat Panel LED Brick Light, Sand Blast Lens	2.0 lbs.
SL-50-LEDPCL-BRS	Cast Brass 1 Louver Flat Panel LED Brick Light, Clear Lens	2.0 lbs.

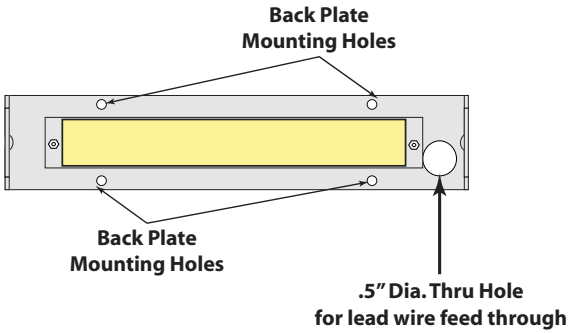

IP54

Intertek

JOB INFORMATION

Type: Date:

Job Name:

Cat. No.:

Lamp(s):

Specifier:

Contractor:

Notes:

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630
www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder		Acid Rust	Acid Verde	Black Acid Treatment
-BLT	*-ATV*	*-BRT*	*-CAM*	*-WTX*	*-HTX*	*-RST*	*-WIR*	*-WBR*	*-STU*	*-RBV*	*-CPR*		*-BAR/CAR*	*-BAV/CAV*	*-BAT*

BRASS & COPPER ONLY

LED BRICK LIGHTS
SL-50-LEDP SERIES

TYPE

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

Distance From Surface: 1 FT

SL-50-LEDP
Std. White Lens Half Spread Photometrics

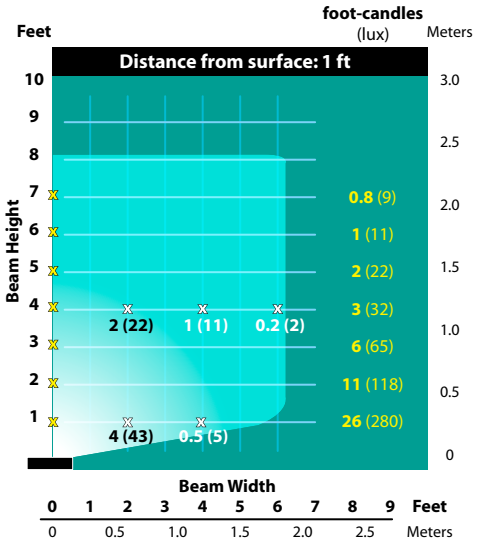

SL-50-LEDP-SB
Sand Blast Lens Half Spread Photometrics

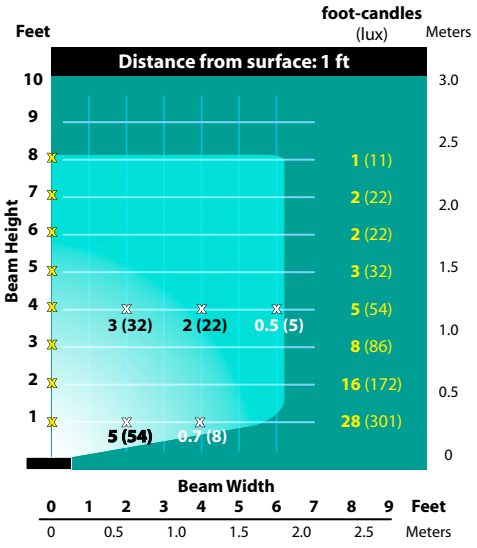

SL-50-LEDP-CL
Clear Lens Half Spread Photometrics

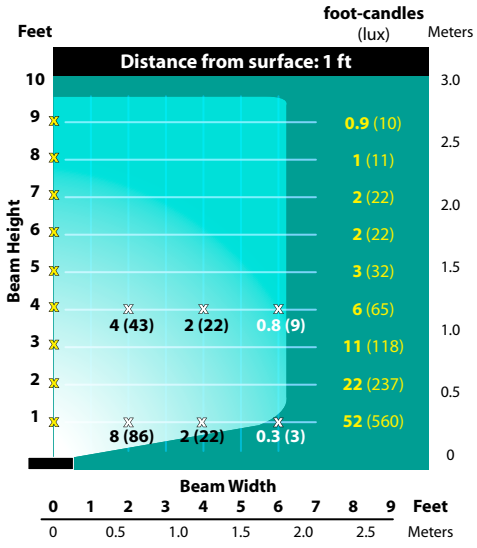

Distance From Surface: 2 FT

SL-50-LEDP
Std. White Lens Half Spread Photometrics

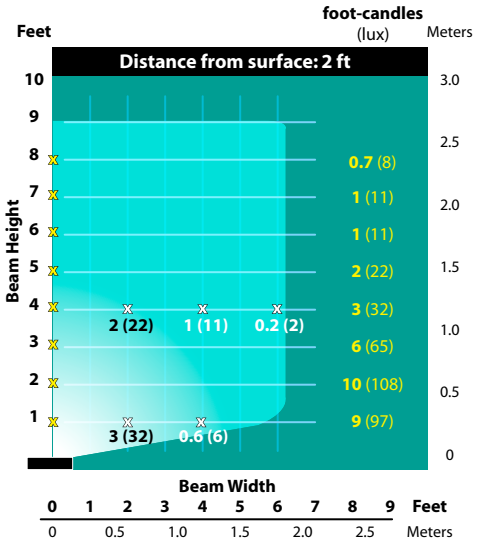

SL-50-LEDP-SB
Sand Blast Lens Half Spread Photometrics

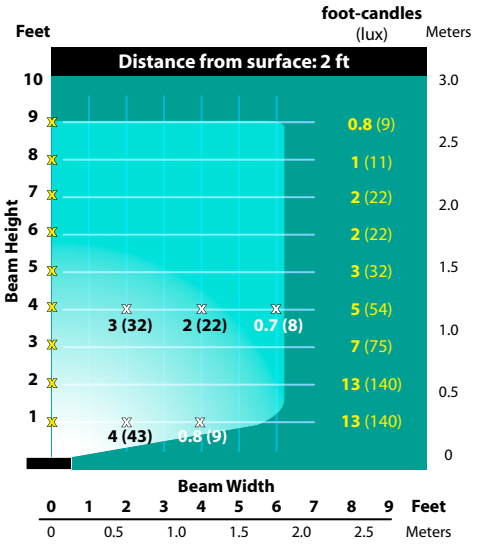
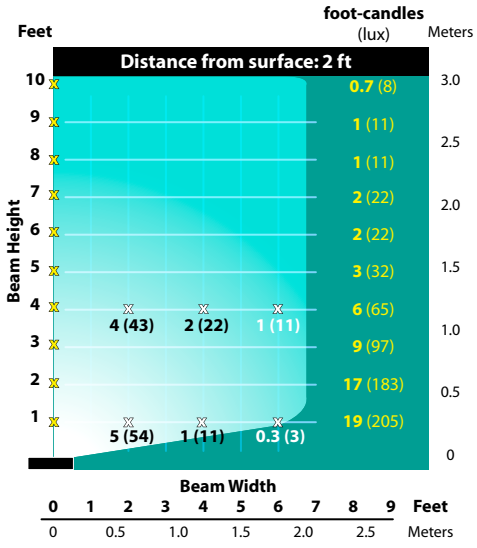
SL-50-LEDP-CL
Clear Lens Half Spread Photometrics