

FIN - MODEL: WP-LED1


Endurance Wallpack

WAC

Responsible Lighting®



IP66, WET



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire


FEATURES

- Factory-Sealed LED Light Engine
- 20° Forward Throw Illumination
- Photo/Motion Sensor Compatible (Sold Separately)
- Built-in Level For Easy Adjustment
- Suitable to install in all directions
- Multi-Function Dimming: ELV (120V) or 0-10V
- 85 CRI
- 100,000 hour rated life

SPECIFICATIONS

Construction:	Die-cast aluminum
Power:	Integral driver in luminaire. Universal voltage input (120V-277V)
Dimming:	100% - 30% with 0 - 10V dimmer (120V - 277V) 100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)
Finish:	Architectural Bronze, Graphite, and White
Standards:	IP66, Wet Location, ETL & cETL Listed
Total Harmonic Distortion:	35%
Operating Temperature	-40°C (-40°F) to 40°C (104°F)

PHOTOMETRY

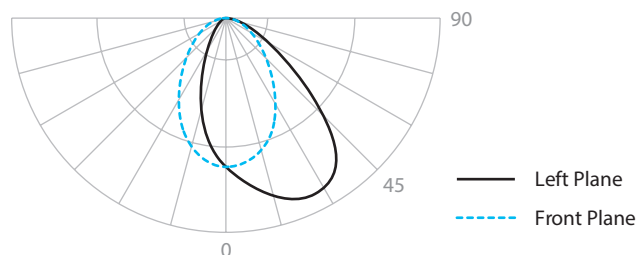

ORDERING NUMBER

		Color Temp	Comparable	Color Temp				Finish	
	WP-LED119	19W	39W HID	30	3000K	1390	1030	aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White	
	WP-LED127	27W	70W HID	30	3000K	2075	1461		
	WP-LED135	35W	100W HID	30	3000K	2750	1930		

- -

Example: **WP-LED119-30-aBZ**

PHOTOMETRY

	Motion Sensor (120V)	MS-120-BZ Bronze MS-120-GY Gray MS-120-WT White
--	----------------------	--

	Photo Sensor (120V)	PC-120-BZ Bronze PC-120-GY Gray PC-120-WT White
--	---------------------	--

wacighting.com

Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761