

# WAC LIGHTING

## Rubix

### Single & Double Wall Mount 3000K

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
WS-W2504 5" - 1 Light	3000K 90	16W	945	AL Brushed Aluminum
WS-W2505 5" - 2 Lights	3000K 90	31W	1890	BK Black BZ Bronze GH Graphite WT White

Example: **WS-W2504-AL**

#### DESCRIPTION

Available in single and twin light configurations, this die-cast aluminum LED wall luminaire is Wet Location listed for a broad range of exterior lighting applications. Designed with asquare profile, this version of Rubix mounts upwards or downwards.

#### FEATURES


- 2504 Single, 2505 Double
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS


<b>Construction:</b>	Die-cast Aluminum
<b>Power:</b>	16W, 31W
<b>Input:</b>	120-277V, 50/60Hz
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5%
<b>Light Source:</b>	Integrated LED
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Mounts directly to junction box, Can be mounted on wall in all orientations
<b>Finish:</b>	Electrostatically Powder Coated:Black, Electrostatically Powder Coated::Bronze, Electrostatically Powder Coated:::Graphite, Electrostatically Powder Coated::::White, Electrostatically Powder Coated:::::Brushed Aluminum, Electrostatically Powder Coated:::White, Electrostatically Powder Coated:::::Graphite
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



#### FINISHES:

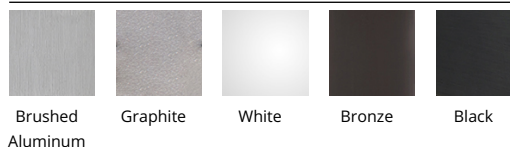

#### LINE DRAWING:

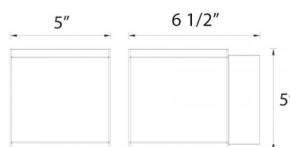

WS-W2504, WS-W2505