

# WAC LIGHTING

## Tube

### Single & Double Wall Mount 3000K

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
WS-W2604 5" - 2 Lights	3000K 90	25W	1188	AL Brushed Aluminum
	3000K 90	33W	2195	BK Black
	3000K 90	16W	1091	BZ Bronze
WS-W2605 5" - 1 Light				GH Graphite
				WT White

Example: **WS-W2604-AL**

#### FEATURES


- Title 24 may not be available for all finishes, check for availability
- 2605 Single, 2604 Double
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

<b>Construction:</b>	Die-cast Aluminum
<b>Power:</b>	16W, 25W, 33W
<b>Input:</b>	120-277V, 50/60Hz
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5%
<b>Light Source:</b>	Integrated LED
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Mounts directly to junction box, Can be mounted on wall in all orientations
<b>Finish:</b>	Brushed Aluminum with Clear Powder Coat:Brushed Aluminum, Brushed Aluminum with Clear Powder Coat::Black, Brushed Aluminum with Clear Powder Coat:::Bronze, Brushed Aluminum with Clear Powder Coat::::Graphite, Brushed Aluminum with Clear Powder Coat:::::White, Powder Coat White:White, Powder Coat White:::Graphite, Powder Coat White:::Bronze, Powder Coat White::::Black, Powder Coat White:::::Brushed Aluminum
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



#### FINISHES:

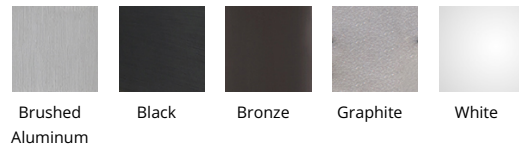

#### LINE DRAWING:

