

WI-FI SMART SOCKET 3.0




DESCRIPTION

The Brilliance Wi-Fi Smart Socket 3.0 is designed specifically to pair with a landscape lighting transformer in lieu of a traditional photocell. Remotely control your entire lighting system from anywhere in the world with the Brilliance Smart app.

FEATURES

- Designed specifically for landscape lighting transformers
- New antenna promotes improved Wi-Fi signal
- Plugs directly into 120 VAC outlet
- Made for indoor or outdoor enclosures
- Conformal coating circuits protect against humidity
- Control landscape lighting from Brilliance Smart App
 - Turn on or off from anywhere
 - Set and change timers
 - Share devices with family
 - Use third-party controls like Alexa and Google Assistant
- Android and iOS compatible
- ETL Listed in US and Canada
- Easy access to instruction via QR code on top

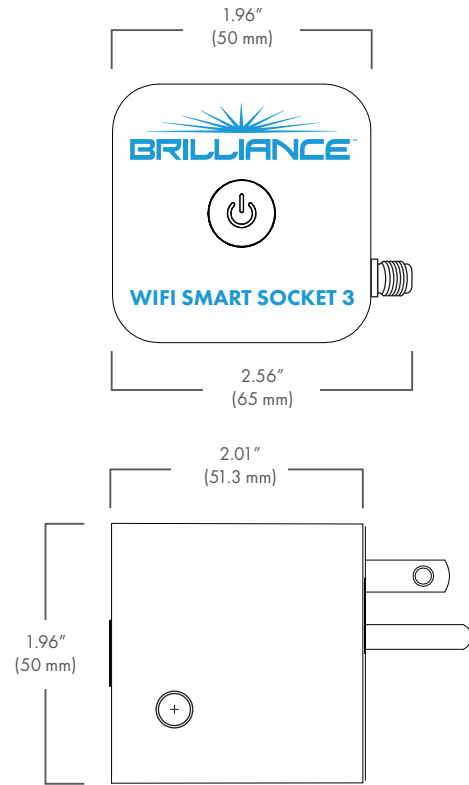

Part Number:
BRI-WIFI-SMART-SOCKET-3

WI-FI SMART SOCKET 3.0 SPECS

Operating Range	14°F to 104°F
Capacity	10 Amps
ETL Listed Mark	5025307
IP	61
Warranty (years)	2



TECHNICAL REQUIREMENTS: Must have consistent 2.4 GHz Wi-Fi signal at the installation location with dBm strength of -70 or better. See the Brilliance Smart Products Guide for more information and troubleshooting. Must be placed in landscape lighting transformer or in a covered receptacle box.