

SPECIFICATION SHEET

Type:

Model:

Project:

MODEL 2147 Landscape Series • Brass & Copper • Step & Brick Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Injection-molded, glass-reinforced Ryton® R-4 composite for strength & high UV stability – warranted for ten years against corrosion. Cover plate is fitted to recessed box with a silicone O-ring gasket.

COVER PLATE:

Precision CNC-machined solid brass faceplate, fitted to housing with a silicone O-ring gasketed lens – providing a superior weather-tight seal.

FINISH:

Brushed Natural Brass, Olde Brass, or Stainless Steel.

SOCKET/LAMP HOLDER:

Top grade ceramic socket with nickel contacts, stainless steel springs, & Teflon-jacketed wire leads.

LENS:

Frosted, tempered, shock & heat-resistant, soda-lime glass lens - crowned (convex) to increase beam spread.

LAMP TYPE:

- MR-16 Halogen 35W maximum. LN-20 BAB (20W) Standard.
- MR-16 LED Lamp 36° Flood, 4.5W is standard.

OPTICS/AIMING:

Adjustable lamp bracket provides up to $\pm 25^{\circ}$ of tilt for precise beam control. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping.

MOUNTING:

Recessed mounting box has two ½" NPT inlets. Optional concrete mounting kit available, please see accessories column on fixture ordering information

FASTENERS/INSERTS:

All fasteners are stainless steel with brass inserts.

WIRING:


Provided with a three-foot pigtail of 18-2 direct-burial cable & underground connectors for a secure connection to supply cable.


CERTIFICATION:

UL Listed to U.S. & Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. & Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

All Vista luminaires are MADE IN U.S.A.

DIMENSIONS:

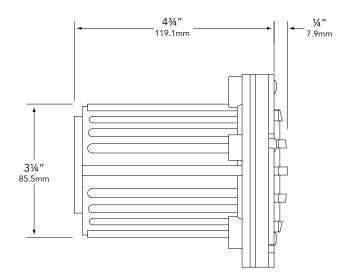





Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 2147 Landscape Series • Brass & Copper • Step & Brick Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: SL-2147-BSN-BAB

MOUNTING	MODEL	FINISH	LAMP	ACCESSORIES
SL- Step light	2147	BSN - Natural Brass BSO - Olde Brass	BAB - 20W	CBL - Crowned Blue Lens DBL - Dark Blue Lens
		SS - Stainless Steel	LN-20 BAB Standard Halogen	SL - Spread Lens GL - Dark Green Lens
			4.5-W-36 - 4.5W	RL - Red Lens YL - Amber Lens
			LN16-4.5-W-A-36-LED Standard LED	HL - Honeycomb Louver
			(Please see lamp order code column in lamp guide of Vista product catalog)	

Fixtures shipped with standard lamp, unless otherwise specified.