

Tools needed for installation

Spade or trench tool/ Direct burial rated speaker cable	
16AWG.....	100 ft
14AWG.....	100 - 150 ft
12AWG.....	150 - 200 ft

Specifications

Design:	Weather resistant Omni Subwoofer True 360° Omni Directional Sub
Woofer:	8" Subwoofer
Frequency Response:	50Hz - 250Hz (Crossover at 250Hz)
Sensitivity:	1W/1m 88db ± 3
Power Handling:	10W - 250W
Impedance:	8 Ohms
Dimensions:	L-12" x W-12" x H-13"
Weight:	13.5 lbs
Warranty:	5 Years

The Technical Support Center at OSD Audio is available between the hours of 8:30 AM - 5:30 PM PST, Monday through Friday, excluding holidays.

Warranty & Repair

All OSD Audio speaker products have (5) year Limited Warranty against defects in materials and workmanship. Proof of purchase must accompany all claims. During the warranty period OSD will replace any defective part and correct any defect in workmanship without charge for either parts or labor.

OSD Audio may replace returned speakers with a product of equal value and performance. In such cases, some modifications to the mounting may be necessary and are not OSD's responsibility.

For this warranty to apply, the unit must be installed and used according to its written instructions. If necessary, repairs must be performed by OSD. The unit must be returned to OSD at the owner's expense and with prior written permission. Accidental damage and shipping damage are not considered defects, nor is damage resulting from abuse or from servicing performed by an agency or person not specifically authorized in writing by OSD.

OSD Audio sells products only through authorized dealers and distributors to ensure that customers obtain proper support and service. Any OSD product purchased from an unauthorized dealer or other source, including retailers, mail over dealers and online sellers will not be honored or serviced under existing OSD warranty policy. Any sale of product by an unauthorized source or other manner not authorized by OSD shall void the warranty on the applicable product.

Damage to or destruction of components due to application of excessive power voids the warranty on those parts. In these cases, repairs will be made on the basis of the retail value of the parts and labor. To return for repairs, you must email customer service at RMA@osdaudio.com for a Returned Merchandise Authorization (RMA) number; then the unit must be shipped to OSD at the owner's expense, along with a note explaining the nature of service required. Be sure to pack the speaker(s) in a corrugated container with at least 3 inches of resilient material to protect the unit from damage in transit.



This Warranty Does Not Cover:

Damage caused by abuse, accident, misuse, negligence, or improper operation (installation) • Any products that have been altered or modified • Any product whose identifying number of decal, serial #, etc. has been altered, defaced or removed • Normal wear and maintenance.

Optional Connection with Omni satellite

Connects 2 satellite speakers from ultimate outdoor sound experience.


OMNI Sub-Sat System #1: 1 OMSUB200 and a Pair of OS525

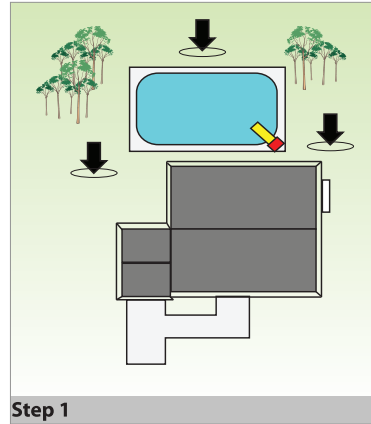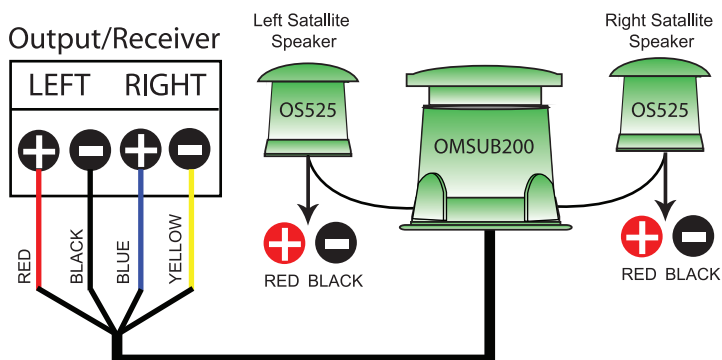

Step 1

Evaluate the location of the subwoofer. Project the length of speaker wire you will run.


Note: Select a reasonably level surface for the installation. This will ensure more uniform sound dispersion.

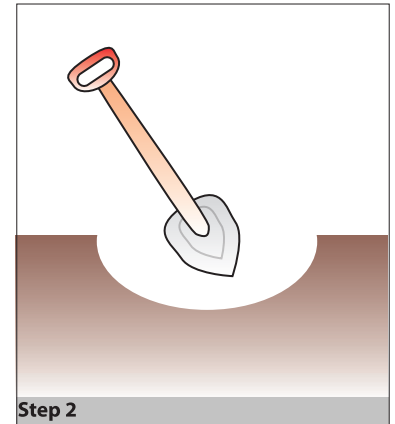

Step 2


Once you have decided on the location for your subwoofer, dig a trench about 5" leading from the sub to the input source for the wires.

For the subwoofer, dig a hole approx 14" in diameter and 6" deep.

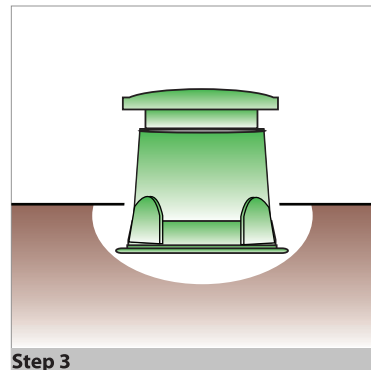

Step 3

Place the subwoofer in the pre-dug hole and run the wire from the trench to the location of the amplifier.

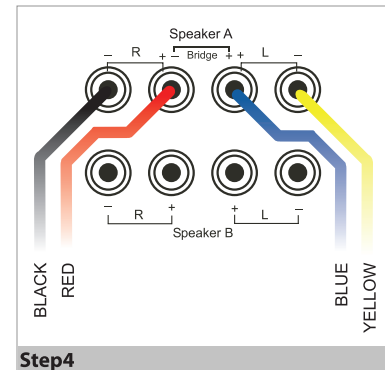

Step 4

Connect the wire from the subwoofer to the amplifier. Please make sure the polarity is correct from your subwoofer to the amplifier.

Optional Connection with Omni Rock satellite

Connects 2 satellite speakers from ultimate outdoor sound experience.

OMNI Sub-Sat System #2: 1 OMSUB200 and a Pair of RS6600M

