

# SPECIFICATION SHEET

Type:

Model:

Project:

# MODEL 2166 Landscape Series • Brass & Copper • Path & Spread Lights

# **FIXTURE SPECIFICATIONS:**

## **HOUSING:**

Stainless steel shade with a precision CNC-machined, Twist-to-Lock solid brass lamp base for easy tool-free lamp access.

#### STEM:

½" heavy-gauge, extruded, brass pipe with ½" NPT.

### FINISH:

Stainless steel. and natural brass.

### **SOCKET/LAMP HOLDER:**

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

#### LENS:

Panoramic Plus - Wave shaped, textured, Tuffak® lens for superior light distribution.

## **LAMP TYPE:**

T3 – 20W maximum. LN-10 T3 Halogen (10W) Standard.

#### MOUNTING:

Bottom of stem threaded with  $\frac{1}{2}$ " NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or floor-mounting canopies.

## **FASTENERS:**

All fasteners are stainless steel.

## WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

### **CERTIFICATION:**


UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

All Vista luminaires are MADE IN U.S.A.

This fixture is also available as a LED luminaire. Please refer to LED Specification Sheet - 2166-LED.

# **DIMENSIONS:**



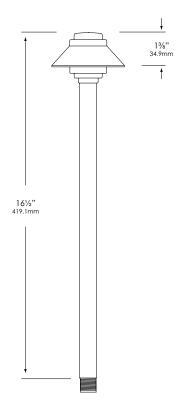



Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# **SPECIFICATION SHEET**

# MODEL 2166 Landscape Series • Brass & Copper • Path & Spread Lights

# FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: PR-2166-BSN-10T3

MOUNTING	MODEL	FINISH	LAMP
PR - ABS ground stake	2166	BSN - Stainless steel hat with brass	5T3 - 5W
		stem.	10T3 - 10W
			20T3 - 20W
			T3 Halogen
			20W Maximum
			LN-10 T3 Halogen (10W) Standard
			Liv-10 13 Halogen (10W) Standard
			2.5-W-T3
			LNT3-2.5-W-G-LED
			W-LB2ND - Warm 2.5W
			N-LB2ND - Neutral 2.5W
			C-LB2ND - Cool 2.5W
			W-LB5ND - Warm 5W
			N-LB5ND - Neutral 5W
			C-LB5ND - Cool 5W
			(Please see lamp order code
			column on lamp guide, Vista
			product catalog.)

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

 $Note: Optional\ custom\ length\ stems\ available.\ Consult\ local\ distributor.$