



PROFESSIONAL
OUTDOOR LIGHTING

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 4016 Landscape Series • Specialty Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Heavy gauge extruded aluminum.

STEM:

Heavy gauge, adjustable, nickel plated stainless steel tubing.

FINISH:

Natural, polished aluminum housing & base with nickel plated stem.

SOCKET/LAMP HOLDER:

Top grade ceramic socket with nickel contacts, stainless steel springs, & Teflon-jacketed wire leads.

LENS:

Shock & heat resistant soda-lime glass lens.

LAMP TYPE:

MR16 – 20W maximum. LN-20 BAB (20W) Standard.

MOUNTING:

Bottom of stem threaded into CNC-machined solid aluminum mounting canopy.

FASTENERS:

All fasteners are stainless steel.

WIRING:


Prewired with a 3' pigtail of 18-2 direct-burial cable & underground connectors for a secure connection to supply cable. Optional hardwired on/off switch available.

CERTIFICATION:

UL Listed to U.S. & Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. & Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN U.S.A.**

DIMENSIONS:

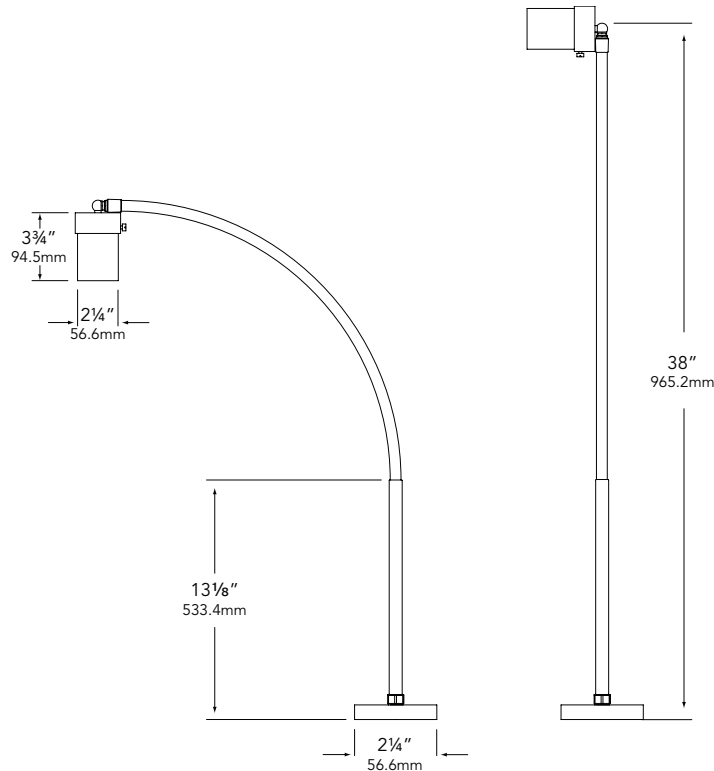

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 4016 Landscape Series • Specialty Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: FL-4016-N-BAB-SL

| MOUNTING | MODEL | FINISH | LAMP | ACCESSORIES |
|---|-------|------------|--|---|
| FL - Flexible stem with solid CNC-machined aluminum mounting base | 4016 | N - Nickel | MR-16 Halogen 20W maximum LN-20 BAB (20W) Standard <i>(Please see lamp order code column on lamp guide, Vista product catalog.)</i> | BL - Flat Cool Blue lens SL - Flat Spread lens FR - Flat Frosted lens DBL - Flat Dark Blue lens GL - Flat Dark Green lens RL - Flat Red lens YL - Flat Amber lens |

Fixtures shipped with standard lamp, unless otherwise specified.