



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 5240 Landscape Series • In-Ground & Well Lights

#### FIXTURE SPECIFICATIONS:

**HOUSING:**

Black silicone rubber lamp holder suspended inside a 5" black ABS well.

**FINISH:**

Available in Black only.

**SOCKET/LAMP HOLDER:**

Socket not required. Fixture supplied with high-temperature rated screw terminal spade connectors.

**LENS:**

Lens cover ordered separately, but not required.

**LAMP TYPE:**

PAR-36 – 50W maximum. LNH-7558 (20W) Standard.

**OPTICS/AIMING:**

Adjustable lamp bracket provides up to  $\pm 25^\circ$  of tilt as well as  $360^\circ$  rotation of housing for precise beam control. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping. Housing bracket within ABS well provides up to  $\pm 45^\circ$  of tilt in addition to lamp bracket.

**MOUNTING:**

In-grade. Mounting accessories not required.

**FASTENERS:**


All fasteners are stainless steel.

**WIRING:**

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are [MADE IN U.S.A.](#)

#### DIMENSIONS:

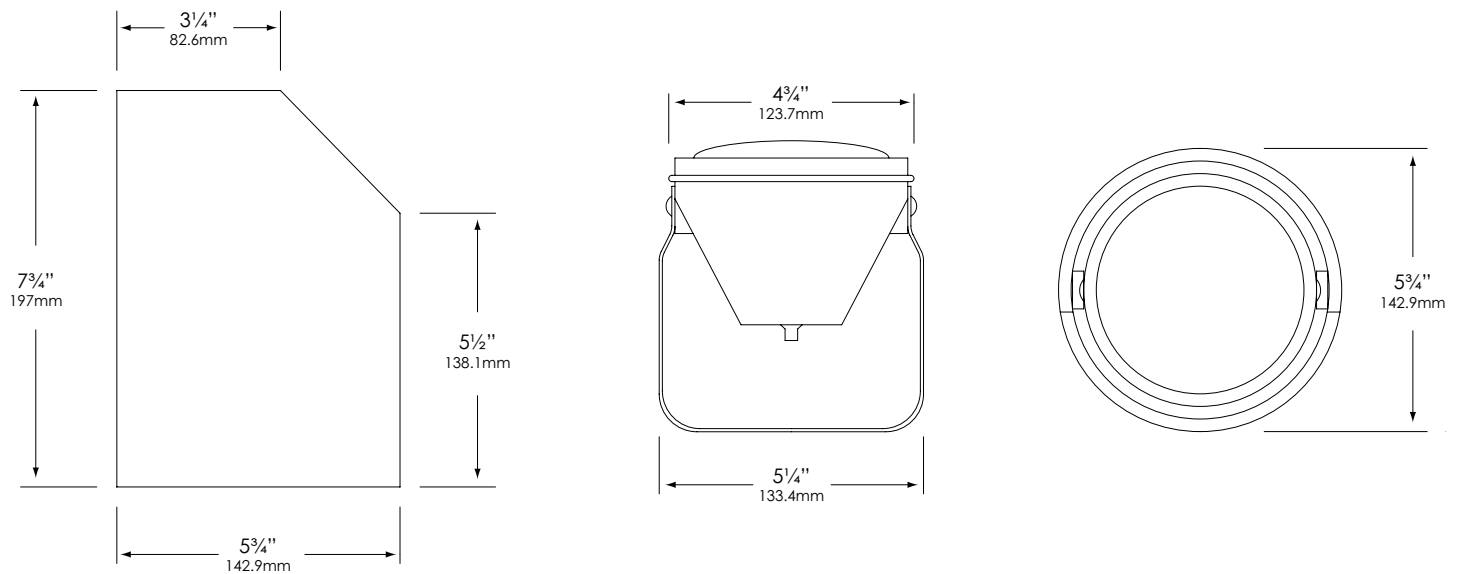

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



## SPECIFICATION SHEET

### MODEL 5240 Landscape Series • In-Ground & Well Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: GW-5240-B-7558-CBL**

MOUNTING	MODEL	FINISH	LAMP	ACCESSORIES
GW - In-grade	5240	B - Black	BAB/FG - 20W  LN-20 BAB/FG Standard Halogen  4.5-W-36 - 4.5W  LN16-4.5-W-A-36-LED standard LED  W-LF3SP - Warm, 3 Emitter, 5W, Spot C-LF3SP - Cool, 3 Emitter, 5W, Spot W-LF3MF - Warm, 3 Emitter, 5W, Medium Flood C-LF3MF - Cool, 3 Emitter, 5W, Medium Flood W-LF3WF - Warm, 3 Emitter, 5W, Wide Flood C-LF3WF - Cool, 3 Emitter, 5W, Wide Flood  W-LF6SP - Warm, 6 Emitter, 10W, Spot C-LF6SP - Cool, 6 Emitter, 10W, Spot W-LF6MF - Warm, 6 Emitter, 10W, Medium Flood C-LF6MF - Cool, 6 Emitter, 10W, Medium Flood W-LF6WF - Warm, 6 Emitter, 10W, Wide Flood C-LF6WF - Cool, 6 Emitter, 10W, Wide Flood  W-LF9SP - Warm, 9 Emitter, 17W, Spot C-LF9SP - Cool, 9 Emitter, 17W, Spot W-LF9MF - Warm, 9 Emitter, 17W, Medium Flood C-LF9MF - Cool, 9 Emitter, 17W, Medium Flood W-LF9WF - Warm, 9 Emitter, 17W, Wide Flood C-LF9WF - Cool, 9 Emitter, 17W, Wide Flood  (Please see lamp order code column on lamp guide, Vista product catalog.)	CL - Clear tempered lens cover DL - Directional Grate cover BD - Bidirectional Grate cover

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.