1633 Staunton Ave
Los Angeles, CA 90021
TEL. (800) 727-9262 (213) 747-4500
FAX. (800) 727-9957 (213) 747-3234
E-Mail: sales@coronalighting.com

CORONA Lighting
WWW.CORONALIGHTING.COM
ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

PRODUCT # : CL-534B-AB

- Directional Lights Catagory
- Cast Brass

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.

Finish: **AB- Antique Bronze**. Natural toning process. AB finish will vary due to artistic process.

Lens: Frosted and heat resistant tempered flat glass, supplied with extra clear and linear glass lenses.

Socket: Top grade fixed ceramic bi-pin socket.

Lamp: 12V, T3 halogen, 50W max. L-20T3 (20w) standard. LED lamps available in 1W and 4W- 3000k color temperature. Xenon lamps available in 10W and 20W

Wiring: Fixture is prewired with a 5-ft 18-2 SPT2-W direct burial cord. Wire connector available seperately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.

Gasket: Silicone gasket for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw and ½" NPT threaded male hub on bottom.

Mounting Spike: Standard injection molded spike with ½" NPT threaded female hub.

Electrical Notes: A remote 12V transformer required, may be ordered to Corona Lighting seperately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 10V-14V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.

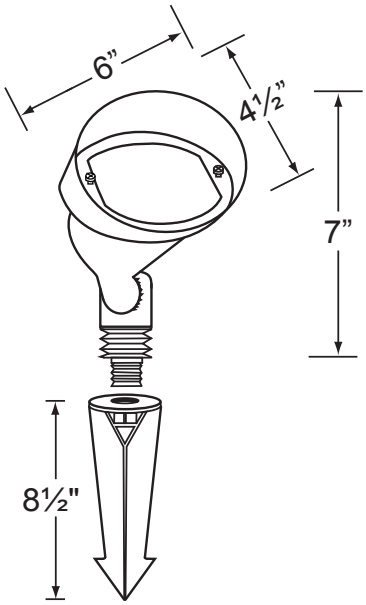

LED

1W and 4W

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE

Mounting Stems

CX-682B-AB	6"
CX-683B-AB	12"
CX-684B-AB	18"
CX-685B-AB	24"

AB - Antique Bronze

Mounting Canopy

CX-709B-AB

AB- Antique Bronze

Mounting Pedestal

CX-603-BK

BK - Black

JOB INFORMATION

TYPE: **DATE:**

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.