

SPECIFICATION SHEET

PRODUCT # : CL-734B-AB

• Path Lights

• Cast Brass


Fixture Specifications:

- Housing & Shroud:** Corrosion resistant Cast Brass.
- Stem:** Solid brass pipe with 1/2" NPT on bottom.
- Finish:** **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process.
- Lens:** Frosted and heat resistant tempered flat glass, supplied with extra clear and linear glass lenses.
- Socket:** Top grade fixed ceramic bi-pin socket.
- Lamp:** 12V, T3 halogen, 50W max. L-20T3 (20w) standard. LED lamps available in 1W and 4W -3000K color temperature. Xenon lamps available in 10W and 20W
- Gasket:** Silicone gasket for water tight sealing.
- Knuckle:** Adjustable cast brass knuckle with thumb screw.

- Wiring:** Fixture is prewired with 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.
- Mounting Spike:** Standard injection molded spike with 1/2" NPT threaded female hub.
- Electrical Notes:** A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage for LED lamps are 10V-14V. Proper grease/lubricant is suggested on threaded parts during installation process.
- Warranty:** Limited lifetime warranty on fixture housing and stem against manufacturer's defects.



CL-734B-AB
24" Standard
stem shown

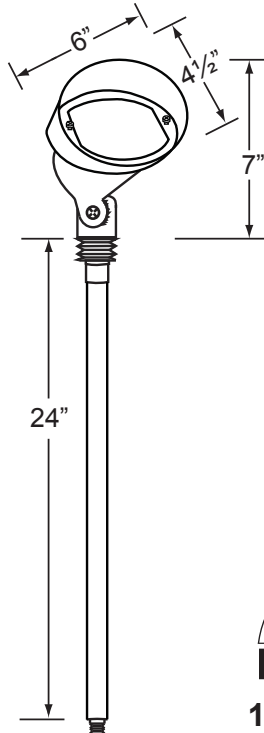

CL-734B-AB-18
18" Stem shown

Stem
option

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Stems

- CX-682B-AB 6"
- CX-683B-AB 12"
- CX-684B-AB 18"
- CX-685B-AB 24"
- AB - Antique Bronze



Mounting Canopy

- CX-709B-AB
- AB- Antique Bronze



Mounting Pedestal

- CX-603-BK
- BK - Black

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: