



LED STEP LIGHTS SL-02-LEDP SERIES

GOGREEN

TYPE

SPECIFICATIONS

CONSTRUCTION: Stamped aluminum, brass, copper or stainless steel (-SS available only on SL-02 4 louver model) step/brick light with stamped stainless steel surface mounting bracket - no back box required

3 LENS OPTIONS:

SL-02-LEDP: Standard white acrylic; creates warm 2700K incandescent like color
 SL-02-LEDP-SB: Sand Blast clear acrylic; creates soft 3000K halogen like color
 SL-02-LEDP-CL: Clear acrylic; bright halogen 3000K color

GASKET: Black neosponge closed cell; .190" thickness

LIGHT SOURCE: 12v, 4w integrated LED flat panel with external driver, warm white 3000K
 350 lumens (3000K) / 380 lumens (5200K)

LIFETIME RATING: 50,000 hours

SOCKET: None

DRIVER: 4w output, 12v AC input. Maximum distance from fixture is 18 feet.
 For use with magnetic transformers only

VOLTAGE RANGE: 9 to 18 volts. Optimum operating range of 10 to 15 volts for consistent performance and brightness.

WIRING: Red(+) and Black(-) 18 gauge zip cord from LED panel. Connects to external driver Red(+) and Black(-) 18 gauge zip cord.
 Additional 6' 18/2 zip cord supplied for wiring external driver to main cable.
 For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from LED driver to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: Stainless Steel surface mount bracket; four screws and wall anchors provided;
 Face plate attaches to bracket with two provided screws

FINISH: Aluminum - Black texture polyester powder coat; optional finishes available
 Brass - Unfinished; optional finishes available
 Copper-Unfinished; optional finishes available
 Stainless Steel-Brushed

CAUTION: MUST BE POWERED BY LOW VOLTAGE AC MAGNETIC TRANSFORMER ONLY

SL-02: Mounting Holes on all models 3-5/16" on center



SL-02-LEDPCAM



SL-02-LEDPBRS




SL-02-1LLEDPBAR

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-02-LEDP-BLT	Aluminum 4 Louver Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-LEDP-BRS	Brass 4 Louver Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-LEDP-COP	Copper 4 Louver Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-LEDP-SS	Stainless Steel 4 Louver Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-AL-LEDP-BLT	Aluminum Lensed Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-AL-LEDP-BRS	Brass Lensed Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-AL-LEDP-COP	Copper Lensed Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-1L-LEDP-BLT	Aluminum 1 Louver Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-1L-LEDP-BRS	Brass 1 Louver Brick Light	4w Flat Panel LED	2.0 lbs.
SL-02-1L-LEDP-COP	Copper 1 Louver Brick Light	4w Flat Panel LED	2.0 lbs.

Lenses are all standard white acrylic; creates warm 2700K incandescent like color
 Add -SB To Part #: Sand Blast clear acrylic; creates soft 3000K halogen like color
 Add -CL To Part #: Clear acrylic; bright halogen 3000K color
 Add -52 To Part #: 5200K Cool White Flat Panel LED

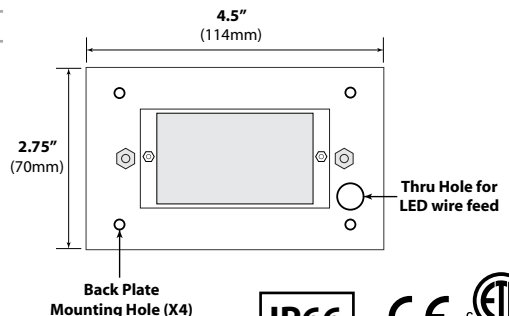

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
 25301 COMMERCENTRE DRIVE
 LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
 (949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT



STEP LIGHTS SL-02 SERIES

TYPE

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT